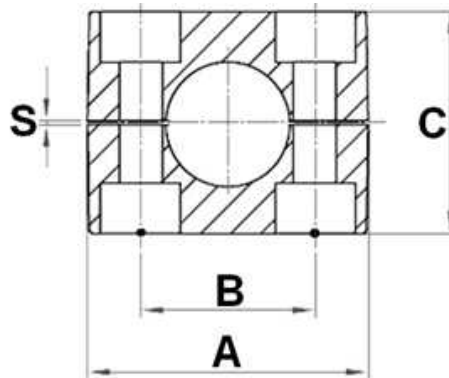


Plastics polypropylene simple, light series**1/1****DIN 3015/1****Recommended temperature** -30 °C + 90 °C.

Part n°	DN	GROUP	A	B	C	S	Thickness (mm)
A106C	6	1	37	20	27	0,4	30
A108C	8	1	37	20	27	0,4	30
A110C	10	1	37	20	27	0,4	30
A112C	12	1	37	20	27	0,4	30
A213.2C	1/4"	2	42	26	33	0,6	30
A214C	14	2	42	26	33	0,6	30
A215C	15	2	42	26	33	0,6	30
A216.7C	3/8"	2	42	26	33	0,6	30
A216C	16	2	42	26	33	0,6	30
A218C	18	2	42	26	33	0,6	30
A319C	19	3	50	33	36	0,6	30
A320C	20	3	50	33	36	0,6	30
A321.3C	1/2"	3	50	33	36	0,6	30
A322C	22	3	50	33	36	0,6	30
A323C	23	3	50	33	36	0,6	30
A325C	25	3	50	33	36	0,6	30
A426.7C	3/4"	4	59	40	42	0,6	30
A428C	28	4	59	40	42	0,6	30
A430C	30	4	59	40	42	0,6	30
A532C	32	5	71	52	58	0,8	30
A533.7C	1"	5	71	52	58	0,8	30
A535C	35	5	71	52	58	0,8	30
A538C	38	5	71	52	58	0,8	30
A540C	40	5	71	52	58	0,8	30
A542C	42-1"1/4	5	71	52	58	0,8	30
A644.5C	44.5	6	86	66	66	0,8	30
A648.3C	1"1/2	6	86	66	66	0,8	30
A650.8C	50.8	6	86	66	66	0,8	30