


Plastics smooth profile, light series

1/1

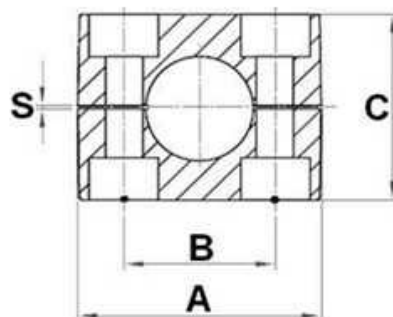

G0	M6x20
G1	M6x20
G2	M6x25
G3	M6x30
G4	M6x35
G5	M6x50
G6	M6x60
G7	M6x90
G8	M6x110

Recommended temperature -30 °C + 90 °C.

Part n°	DN	GROUP	A	B	C	S	Thickness (mm)
AL108C	8	1	37	20	27	0,4	30
AL110C	10	1	37	20	27	0,4	30
AL112C	12	1	37	20	27	0,4	30
AL213.2C	1/4"	2	42	26	33	0,6	30
AL215C	15	2	42	26	33	0,6	30
AL216.7C	3/8"	2	42	26	33	0,6	30
AL218C	18	2	42	26	33	0,6	30
AL320C	20	3	50	33	36	0,6	30
AL321.3C	1/2"	3	50	33	36	0,6	30
AL322C	22	3	50	33	36	0,6	30
AL325C	25	3	50	33	36	0,6	30
AL426.7C	3/4"	4	59	40	42	0,6	30
AL428C	28	4	59	40	42	0,6	30
AL430C	30	4	59	40	42	0,6	30
AL533.3C	1"	5	71	52	58	0,8	30
AL535C	35	5	71	52	58	0,8	30
AL538C	38	5	71	52	58	0,8	30
AL542C	42-1"1/4	5	71	52	58	0,8	30