
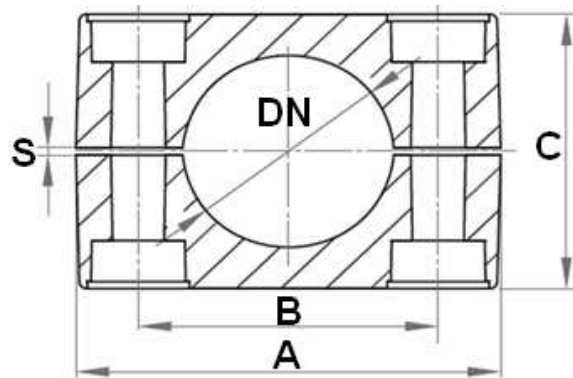


Plastics polypropylene, heavy series

1/1



DIN 3015/2

Recommended temperature -30 °C + 90 °C.

Part n°	DN	Group	A	B	C	E	S
AMPP106C	6	1	55	33	32	30	0,6 min
AMPP108C	8	1	55	33	32	30	0,6 min
AMPP110C	10	1	55	33	32	30	0,6 min
AMPP112C	12	1	55	33	32	30	0,6 min
AMPP113.2C	1/4"	1	55	33	32	30	0,6 min
AMPP114C	14	1	55	33	32	30	0,6 min
AMPP115C	15	1	55	33	32	30	0,6 min
AMPP116C	16	1	55	33	32	30	0,6 min
AMPP117.2C	3/8"	1	55	33	32	30	0,6 min
AMPP118C	18	1	55	33	32	30	0,6 min
AMPP220C	20	2	70	45	48	30	0,6 min
AMPP221.3C	1/2"	2	70	45	48	30	0,6 min
AMPP222C	22	2	70	45	48	30	0,6 min
AMPP225C	25	2	70	45	48	30	0,6 min
AMPP226.7C	3/4"	2	70	45	48	30	0,6 min
AMPP228C	28	2	70	45	48	30	0,6 min
AMPP230C	30	2	70	45	48	30	0,6 min
AMPP330C	30	3	85	60	60	30	0,6 min
AMPP332C	32	3	85	60	60	30	0,6 min
AMPP333.3C	1"	3	85	60	60	30	0,6 min
AMPP335C	35	3	85	60	60	30	0,6 min
AMPP338C	38	3	85	60	60	30	0,6 min
AMPP340C	40	3	85	60	60	30	0,6 min
AMPP342C	42	3	85	60	60	30	0,6 min
AMPP438C	38	4	115	90	89	45	2 min
AMPP442C	42- 1" 1/4	4	115	90	89	45	2 min
AMPP445C	45	4	115	90	89	45	2 min
AMPP448C	48-1" 1/2	4	115	90	89	45	2 min
AMPP450C	50	4	115	90	89	45	2 min
AMPP455C	55	4	115	90	89	45	2 min
AMPP460.3C	2"	4	115	90	89	45	2 min
AMPP465C	65	4	115	90	89	45	2 min
AMPP470C	70	4	115	90	89	45	2 min