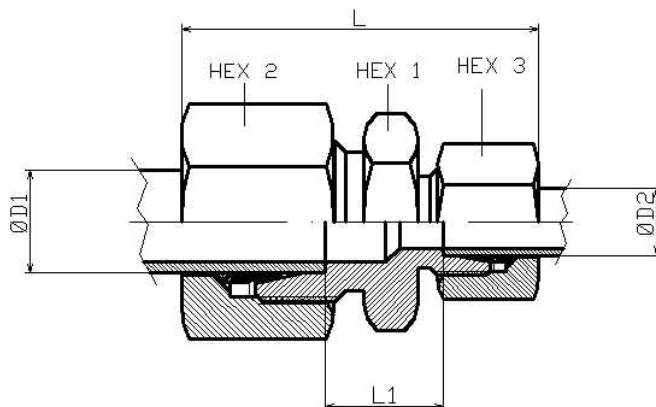


Straight reducing coupling (pipe-pipe)

Mild Steel

1/2

Part n°	$\varnothing D1$	$\varnothing D2$	Serie	Working Pressure (bar)	L	L1	HEX 1	HEX 2	HEX 3
DL 8-6	8	6	L	500	41	11	14	17	14
DL 10-6	10	6	L	500	42	12	17	19	14
DL 10-8	10	8	L	500	42	12	17	19	17
DL 12-8	12	8	L	400	43	13	19	22	17
DL 12-10	12	10	L	400	44	14	19	22	19
DL 15-10	15	10	L	400	45	15	24	27	19
DL 15-12	15	12	L	400	45	15	24	27	22
DL 18-12	18	12	L	400	47	15,5	27	32	22
DL 18-15	18	15	L	400	48	16,5	27	32	27
DL 22-15	22	15	L	250	50	18,5	32	36	27
DL 22-18	22	18	L	250	51	18	32	36	32
DL 28-22	28	22	L	250	54	21	41	41	36
DL 35-22	35	22	L	250	59	21	46	50	36
DL 35-28	35	28	L	250	59	21	46	50	41
DS 8-6	8	6	S	630	48	18	17	19	17
DS 10-6	10	6	S	630	49	17,5	19	22	17
DS 10-8	10	8	S	630	49	17,5	19	22	19
DS 12-6	12	6	S	630	51	19,5	22	24	17
DS 12-8	12	8	S	630	51	19,5	22	24	19
DS 12-10	12	10	S	630	52	19	22	24	22
DS 14-10	14	10	S	630	55	20,5	24	27	22
DS 14-12	14	12	S	630	55	20,5	24	27	24
DS 16-12	16	12	S	420	55	20	27	30	24
DS 16-14	16	14	S	420	58	21,5	27	30	27
DS 20-12	20	12	S	420	60	22	32	36	24
DS 20-16	20	16	S	420	63	23	32	36	30
DS 25-16	25	16	S	420	68	25,5	41	46	30

Straight reducing coupling (pipe-pipe)

Mild Steel

2/2

Part nº	ØD1	ØD2	Serie	Working Pressure (bar)	L	L1	HEX 1	HEX 2	HEX 3
DS 25-20	25	20	S	420	71	25,5	41	46	36
DS 30-20	30	20	S	420	74	26	46	50	36
DS 30-25	30	25	S	420	77	26,5	46	50	46
DS 38-30	38	30	S	315	87	29,5	55	60	50