
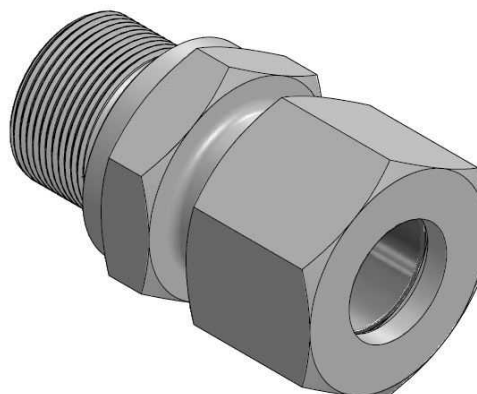


Straight male stud coupling with captive seal BSP cyl

Mild Steel

1/2

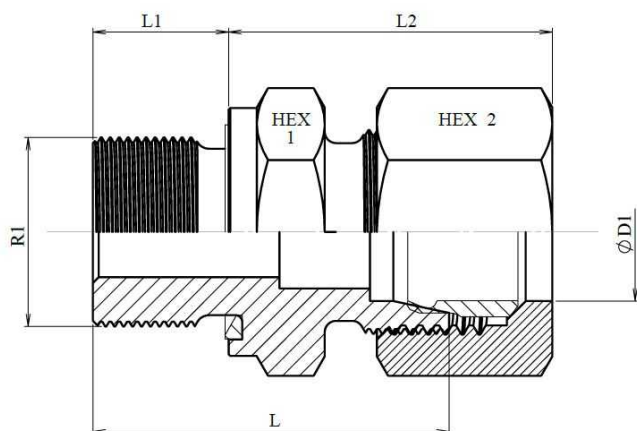

Part nº	ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1	HEX 2
AL 6 R 1/8 WD	6	L	1/8" BSP	500	23,5	8	23,5	14	14
AL 6 R 1/4 WD	6	L	1/4" BSP	500	29	12	25	19	14
AL 6 R 3/8 WD	6	L	3/8" BSP	500	31,5	12	26	22	14
AL 8 R 1/8 WD	8	L	1/8" BSP	500	24,5	8	24,5	14	17
AL 8 R 1/4 WD	8	L	1/4" BSP	500	29	12	25	19	17
AL 8 R 3/8 WD	8	L	3/8" BSP	400	30,5	12	26,5	22	17
AL 8 R 1/2 WD	8	L	1/2" BSP	500	33	14	41	27	17
AL 10 R 1/8 WD	10	L	1/8" BSP	400	25,5	8	33,5	27	17
AL 10 R 1/4 WD	10	L	1/4" BSP	500	30	12	26	19	19
AL 10 R 3/8 WD	10	L	3/8" BSP	400	31,5	12	27,5	22	19
AL 10 R 1/2 WD	10	L	1/2" BSP	400	34	14	28	27	19
AL 12 R 1/4 WD	12	L	1/4" BSP	400	31	12	27	19	22
AL 12 R 3/8 WD	12	L	3/8" BSP	400	31,5	12	27,5	22	22
AL 12 R 1/2 WD	12	L	1/2" BSP	400	34	14	28	27	22
AL 12 R 3/4 WD	12	L	3/4" BSP	400	34	16	29	32	22
AL 15 R 1/2 WD	15	L	1/2" BSP	400	35	14	29	27	27
AL 15 R 3/4 WD	15	L	3/4" BSP	250	37	16	30	32	27
AL 18 R 3/8 WD	18	L	3/8" BSP	400	36	14,5	31	22	32
AL 18 R 1/2 WD	18	L	1/2" BSP	400	36	14	31	27	32
AL 18 R 3/4 WD	18	L	3/4" BSP	250	38	16	31	32	32
AL 22 R 1/2 WD	22	L	1/2" BSP	250					
AL 22 R 3/4 WD	22	L	3/4" BSP	250	40	16	33	32	36
AL 22 R 1 WD	22	L	1" BSP	250	42	18	34	32	36
AL 28 R 3/4 WD	28	L	3/4" BSP	250					
AL 28 R 1 WD	28	L	1" BSP	250	43	18	34	41	41
AL 28 R 1 1/4 WD	28	L	1" 1/4 BSP	250	46	20		50	41
AL 35 R 1 1/4 WD	35	L	1" 1/4 BSP	250	48	20	39	50	50

**Straight male stud coupling with captive seal BSP
cyl**

Mild Steel

2/2

Part nº	ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1	HEX 2
AL 42 R 1 1/2 WD	42	L	1"1/2 BSP	250	52	22	42	55	60
AS 6 R 1/4 WD	6	S	1/4" BSP	630	32	12	28	19	17
AS 8 R 1/4 WD	8	S	1/4" BSP	630	34	12	30	19	19
AS 8 R 3/8 WD	8	S	3/8" BSP	630	34,5	12	30,5	22	19
AS 10 R 1/4 WD	10	S	1/4" BSP	630	34	12	31	19	22
AS 10 R 3/8 WD	10	S	3/8" BSP	630	34,5	12	31,5	22	22
AS 10 R 1/2 WD	10	S	1/2" BSP	630	39	14	34	27	22
AS 12 R 1/4 WD	12	S	1/4" BSP	630	36	12	33	22	24
AS 12 R 3/8 WD	12	S	3/8" BSP	630	36,5	12	33,5	22	24
AS 12 R 1/2 WD	12	S	1/2" BSP	630	39	14	34	27	24
AS 14 R 3/8 WD	14	S	3/8" BSP	630	26,5	38,5	48,5	24	27
AS 14 R 1/2 WD	14	S	1/2" BSP	630	41	14	37	27	27
AS 16 R 3/8 WD	16	S	3/8" BSP	420	38,5	12	36,5	27	30
AS 16 R 1/2 WD	16	S	1/2" BSP	420	41	14	37	27	30
AS 16 R 3/4 WD	16	S	3/4" BSP	420	45	16	39	32	30
AS 20 R 1/2 WD	20	S	1/2" BSP	400	31	45	56	32	36
AS 20 R 3/4 WD	20	S	3/4" BSP	420	47	16	42	32	36
AS 25 R 3/4 WD	25	S	3/4" BSP	420	51	16	47	41	46
AS 25 R 1 WD	25	S	1" BSP	420	53	18	47	41	46
AS 30 R 1 WD	30	S	1" BSP	400	37	55	68	46	50
AS 30 R 1 1/4 WD	30	S	1"1/4 BSP	420	57	20	50	50	50
AS 38 R 1 1/4 WD	38	S	1" 1/4 BSP	420	62	20	57	55	60
AS 38 R 1 1/2 WD	38	S	1"1/2 BSP	315	64	22	57	55	60