
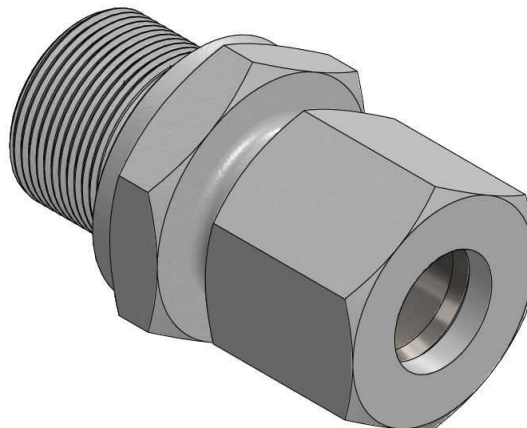


Straight male stud coupling with captive seal

Metrical cyl

Mild Steel

1/1

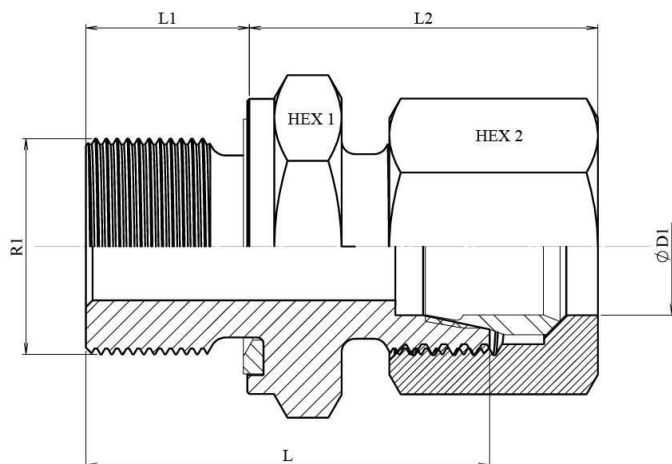

Part n°	ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1	HEX 2
AL 6 M 10X1 WD	6	L	M10x1	500	23	8	23,5	14	14
AL 8 M 12X1.5 WD	8	L	M12x1,5	500	29	12	25	17	17
AL 10 M 14X1.5 WD	10	L	M14x1,5	500	30	12	26	19	19
AL 10 M 16X1.5 WD	10	L	M16x1,5	400	30	12	27,5	22	19
AL 10 M 18X1.5 WD	10	L	M18x1,5	400	32,5	14	27,5	24	19
AL 10 M 22X1.5 WD	10	L	M22x1,5	400					
AL 12 M 14X1.5WD	12	L	M14x1,5						
AL 12 M 16X1.5 WD	12	L	M16x1,5	400	31,5	12	27,5	22	22
AL 12 M 18X1.5 WD	12	L	M18x1,5						
AL 12 M 22X1.5 WD	12	L	M22x1,5	400	33,5	14	29	27	22
AL 15 M 18X1.5 WD	15	L	M18x1,5	400	34,5	14	28,5	24	27
AL 15 M 22X1.5 WD	15	L	M22x1,5	400	34,5	14	30	27	27
AL 18 M 18X1.5 WD	18	L	M18x1,5	315					
AL 18 M 22X1.5 WD	18	L	M22x1,5	400	35,5	14	31	27	32
AL 22 M 26X1.5 WD	22	L	M26x1,5	250	39,5	16	33	32	36
AL 28 M 33X2 WD	28	L	M33x2	250	42,5	18	34	41	41
AL 35 M 42X2 WD	35	L	M42x2	250	48	20	39	50	50
AL 42 M 48X2 WD	42	L	M48x2	250	52	22	42	55	60
AS 6 M 12X1.5 WD	6	S	M12x1,5	630	32	12	28	17	17
AS 8 M 14X1.5 WD	8	S	M14x1,5						
AS 10 M 16X1.5 WD	10	S	M16x1,5	630	34	12	31,5	22	22
AS 12 M 18X1.5 WD	12	S	M18x1,5	630	36,5	12	33,5	24	24
AS 14 M 20X1.5 WD	14	S	M20x1,5	630	40,5	14	37	27	27
AS 16 M 22X1.5 WD	16	S	M22x1,5	420	40,5	14	37	27	30
AS 25 M 33X2 WD	25	S	M33x2	420	52,5	18	47	41	46
AS 30 M 42X2 WD	30	S	M42x2	420	57	20	50	50	50
AS 38 M 48X2 WD	38	S	M48x2	315	64	22	57	55	60