
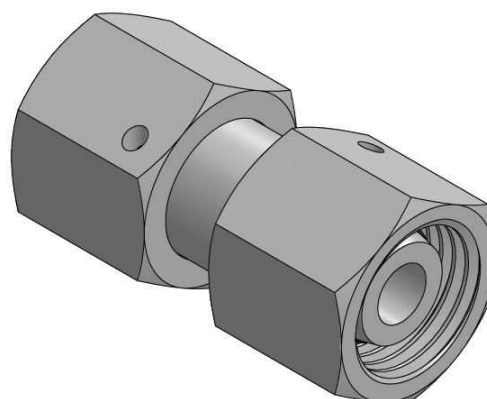


Straight connection with o'ring

Mild Steel

1/1

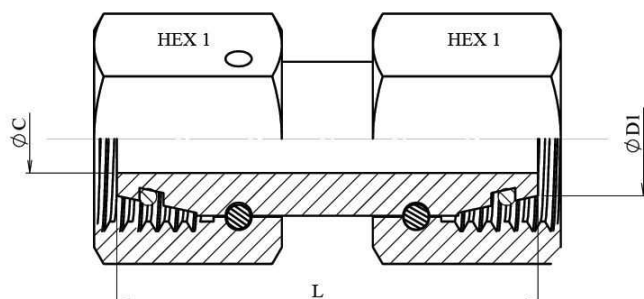

Part n°	ØD1	Serie	Working Pressure (bar)	L	HEX 1	ØC
ATL 6	6	L	500	36,3	14	2,5
ATL 8	8	L	500	36	17	4
ATL 10	10	L	500	37	19	6
ATL 12	12	L	400	39	22	8
ATL 15	15	L	400	41,8	27	10
ATL 18	18	L	400	45,2	32	13
ATL 22	22	L	250	44,4	36	17
ATL 28	28	L	250	46,8	41	22
ATL 35	35	L	250	51,4	50	28
ATL 42	42	L	250	52,4	60	34
ATS 6	6	S	630	35,3	17	2,5
ATS 8	8	S	630	37,5	19	4
ATS 10	10	S	630	41,6	22	6
ATS 12	12	S	630	38,8	24	8
ATS 14	14	S	630	39,8	27	8
ATS 16	16	S	420	39,8	30	11
ATS 20	20	S	420	48,4	36	14
ATS 25	25	S	420	46,2	46	18
ATS 30	30	S	420	51,4	50	23
ATS 38	38	S	315	57,4	60	30