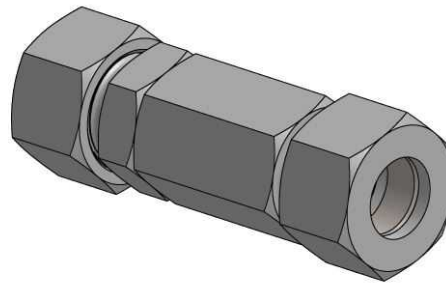
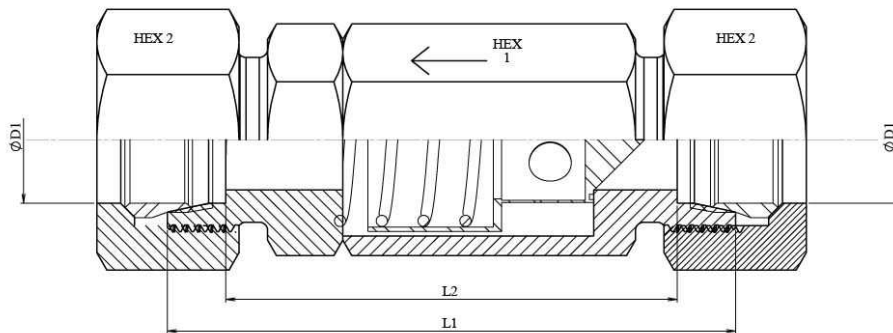


Non-return valve tube-tube

Mild Steel

1/2**Opening pressure: 1 bar**

On request: 1.5 - 2 - 2.5 - 3 bar

Permissible working temperatures without reductions in pressure for captive seals and O-Rings
in NBR: -35° to +100°C

Part n°	ØD1	Serie	Working Pressure (bar)	L1	L2	HEX 1	HEX 2
RHDL 6	6	L	400	68	54	17	14
RHDL 8	8	L	400	68	54	19	17
RHDL 10	10	L	400	70	56	22	19
RHDL 12	12	L	400	57,5	43	30	22
RHDL 15	15	L	315	81	67	27	27
RHDL 18	18	L	250	81	66	36	32
RHDL 22	22	L	250	94	79	41	36
RHDL 28	28	L	160	94	79	55	41
RHDL 35	35	L	160	116	95	60	50
RHDL 42	42	L	160	116	94	65	60
RHDS 6	6	S	420	72	58	17	17
RHDS 8	8	S	420	72	58	17	19
RHDS 10	10	S	420	78	63	22	22
RHDS 12	12	S	420	78	63	24	24
RHDS 14	14	S	420	85	69	27	24
RHDS 16	16	S	420	85	68	32	30
RHDS 20	20	S	250	98	77	38	36
RHDS 25	25	S	250	102	78	46	46
RHDS 30	30	S	250	124	97	55	50
RHDS 38	38	S	250	128	96	65	60

Non-return valve tube-tube

Mild Steel

2/2

Part n°	ØD1	Serie	Working Pressure (bar)	L1	L2	HEX 1	HEX 2
---------	-----	-------	------------------------	----	----	-------	-------

*** Review attached PDF***