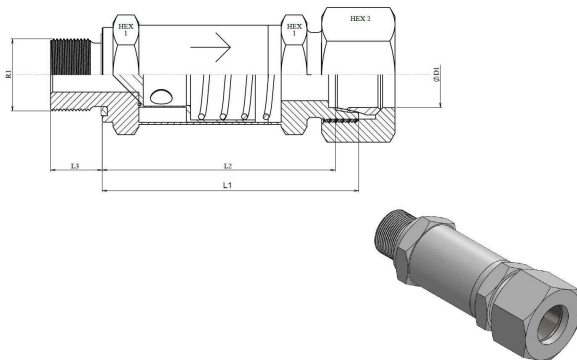


Non-return valve flow from male stud end BSP cyl

Mild Steel

1/1**Opening pressure: 1 bar**

On request: 1.5 - 2 - 2.5 - 3 bar

Permissible working temperatures without reductions in pressure for captive seals and O-Rings in NBR: -35° to +100°C

Part n°	ØD1	Serie	R1	Working Pressure (bar)	L1	L2	L3	HEX 1	HEX 2
RHVL 6 R1/8	6	L	1/8" BSP	250	60	53	8	19	19
RHVL 8 R 1/4	8	L	1/4" BSP	250	60	53	12	19	19
RHVL 10 R 1/4	10	L	1/4" BSP	250	61	54	12	19	32
RHVL 12 R3/8	12	L	3/8" BSP	250	67,5	60,5	12	32	32
RHVL 15 R 1/2	15	L	1/2" BSP	250	72	65	14	41	41
RHVL 18 R1/2	18	L	1/2" BSP	160	72	64,5	14	41	41
RHVL 22 R3/4	22	L	3/4" BSP	160	83	75,5	16	50	50
RHVL 28 R1	28	L	1" BSP	100	83	75,5	18	50	50
RHVL 35 R1 1/4	35	L	1"1/4 BSP	100	103	92,2	20	70	70
RHVL 42 R1 1/2	42	L	1"1/2 BSP	100	103	92	22	70	70
RHVS 6 R1/4	6	S	1/4" BSP	400	62	55	12	19	19
RHVS 8 R1/4	8	S	1/4" BSP	400	62	55	12	19	19
RHVS 10 R3/8	10	S	3/8" BSP	400	68,5	61	12	32	32
RHVS 12 R3/8	12	S	3/8" BSP	400	68,5	61	12	32	32
RHVS 14 R 1/2	14	S	1/2" BSP	400	74	66	14	41	41
RHVS 16 R1/2	16	S	1/2" BSP	400	74	65,5	14	41	41
RHVS 20 R3/4	20	S	3/4" BSP	400	85	74,5	16	50	50
RHVS 25 R1	25	S	1" BSP	250	87	75	18	50	50
RHVS 30 R1 1/4	30	S	1"1/4 BSP	250	107	93,5	20	70	70
RHVS 38 R 1 1/2	38	S	1"1/2 BSP	250	109	93	22	70	70