
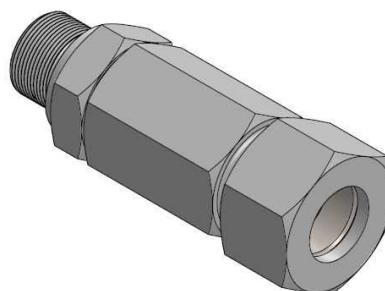


Non-return valve flow towards male stud end BSP cyl

Mild Steel

1/1

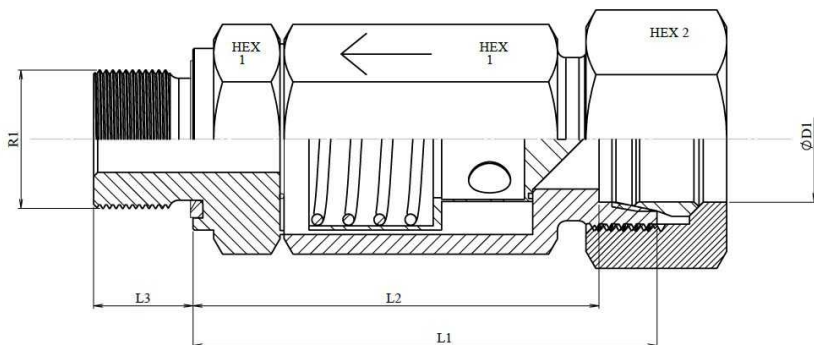

Opening pressure: 1 bar

On request: 1.5 - 2 - 2.5 - 3 bar

Permissible working temperatures without reductions in pressure for captive seals and O-Rings
in NBR: -35° to +100°C

Part nº	ØD1	Serie	R1	Working Pressure (bar)	L1	L2	L3	HEX 1	HEX 2
RHZL 6 R 1/8	6	L	1/8" BSP	250	60	53	8	19	19
RHZL 8 R 1/4	8	L	1/4" BSP	250	60	53	12	19	19
RHZL 10 R 1/4	10	L	1/4" BSP	250	61	54	12	19	19
RHZL 12 R 3/8	12	L	3/8" BSP	250	67,5	60,5	12	32	32
RHZL 15 R 1/2	15	L	1/2" BSP	250	72	65	14	41	41
RHZL 18 R 1/2	18	L	1/2" BSP	160	72	64,5	14	41	41
RHZL 22 R 3/4	22	L	3/4" BSP	160	83	75,5	16	50	50
RHZL 28 R 1	28	L	1" BSP	100	83	75,5	18	50	50
RHZL 35 R 1 1/4	35	L	1"1/4 BSP	100	103	92,2	20	70	70
RHZL 42 R 1 1/2	42	L	1"1/2 BSP	100	103	92	22	70	70
RHZZ 6 R 1/4	6	S	1/4" BSP	400	62	55	12	19	19
RHZZ 8 R 1/4	8	S	1/4" BSP	400	62	55	12	19	19
RHZZ 10 R 3/8	10	S	3/8" BSP	400	68,5	61	12	32	32
RHZZ 12 R 3/8	12	S	3/8" BSP	400	68,5	61	12	32	32
RHZZ 14 R 1/2	14	S	1/2" BSP	400	74	66	14	41	41
RHZZ 16 R 1/2	16	S	1/2" BSP	400	74	65,5	14	41	41
RHZZ 20 R 3/4	20	S	3/4" BSP	400	85	74,5	16	50	50
RHZZ 25 R 1	25	S	1" BSP	250	87	75	18	50	50
RHZZ 30 R 1 1/4	30	S	1"1/4 BSP	250	107	93,5	20	70	70
RHZZ 38 R 1 1/2	38	S	1"1/2 BSP	250	109	93	22	70	70