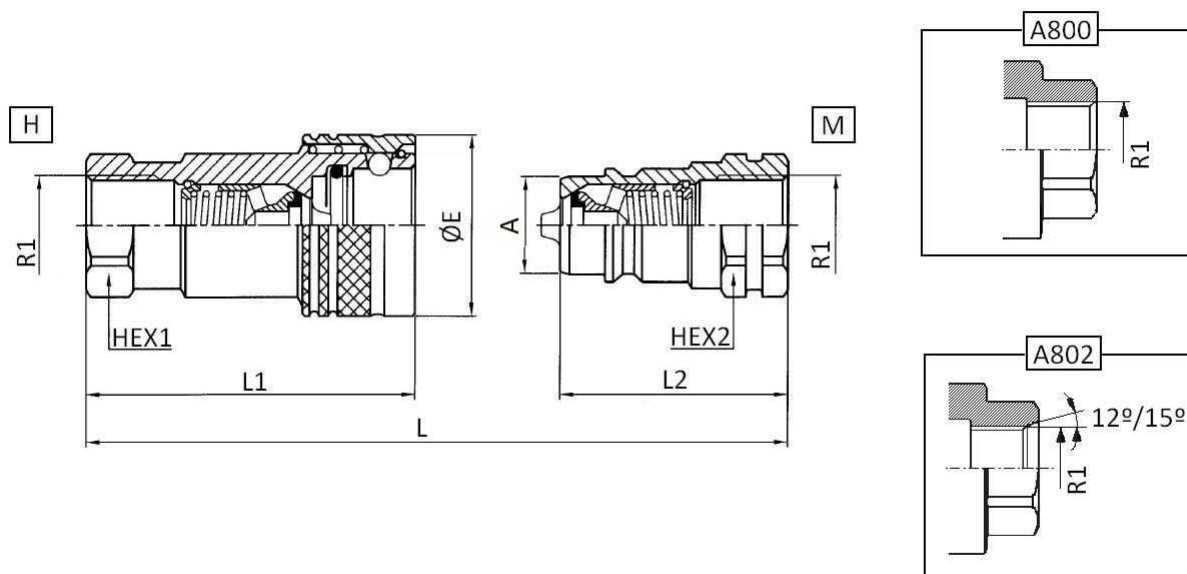


ISO 7241- A Quick release coupling

Mild Steel

1/1**Material:** Steel**Seals:** NBR**Working temperature:** -25°C / +100°C**Working pressure:** 160-350 bar

Part nº	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A800104	1/4" BSP	350	6,3	1	M	12	17	70,5		35		19		11,5
A800106	3/8" BSP	350	10	2	M	23	46	85		42,5		22		17,3
A800108	1/2" BSP	250	12,5	3	M	45	90	96,5		48		27		20,5
A802122	M22X1.5	250	12,5	3	M	45	90	97,2		48		27		20,5
A800112	3/4" BSP	250	20	4	M	106	190	114,5		57		34		29,1
A800116	1" BSP	200	25	5	M	189	280	135,5		67,5		41		34,5
A800120	1"1/4 BSP	200	31,5	6	M	288	480	150,6		75		50		45
A800124	1"1/2 BSP	190	40	7	M	379	700	167,7		83,5		60		55
A800132	2" BSP	50	50	8	M	757	757	217		108		75		65,1
A800204	1/4" BSP	350	6,3	1	H	12	17	70,5	49,2		19		26	-
A800206	3/8" BSP	350	10	2	H	23	46	85	60,5		22		30	-
A800208	1/2" BSP	250	12,5	3	H	45	90	96,5	70		27		38	-
A800212	3/4" BSP	250	20	4	H	106	190	114,5	84,3		34		45	-
A802222	M22X1.5	250	12,5	3	H	45	90	96,5	70		27		38	-
A800216	1" BSP	200	25	5	H	189	280	135,5	101		41		52	-
A800220	1"1/4 BSP	200	31,5	6	H	288	480	150,6	116,9		50		70	-
A800224	1"1/2 BSP	190	40	7	H	379	700	167,7	133		60		82	-