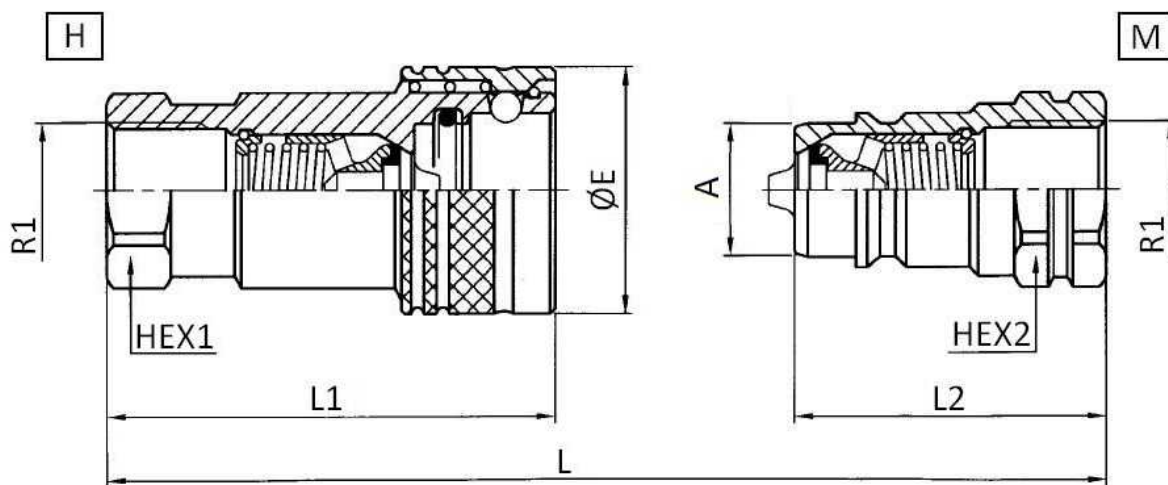


Quick release coupling NV serie

Mild Steel

1/1**Material:** Steel**Seals:** NBR**Working temperature:** -25°C / +100°C**Working pressure:** 100-400 bar

Part nº	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A820104	1/4" BSP	400	6,3	1	M	12	24	76,3		38		19		14,2
A820106	3/8" BSP	350	10	2	M	23	46	85,5		42,5		24		19
A820112	3/4" BSP	250	19	4	M	106	190	114,5		57		34		28
A820116	1" BSP	250	25	5	M	189	250	131,5		65,5		41		31,3
A820120	1"1/4 BSP	220	31,5	6	M	288	480	150,5		75		50		44
A820124	1"1/2 BSP	200	40	7	M	379	700	167,5		83,5		60		53,4
A820132	2" BSP	100	50	8	M	757	1.000	177,5		88,5		70		82
A820204	1/4" BSP	400	6,3	1	H	12	24	76,3	55,5		19		27	-
A820206	3/8" BSP	350	10	2	H	23	46	85,5	63		24		34	-
A820212	3/4" BSP	250	19	4	H	106	190	114,5	86		34		47	-
A820216	1" BSP	250	25	5	H	189	250	131,5	99		41		52	-
A820220	1"1/4 BSP	220	31,5	6	H	288	480	150,5	117		50		70	-
A820224	1"1/2 BSP	200	40	7	H	379	700	167,5	128		60		84	-
A820232	2" BSP	100	50	8	H	757	1.000	177,5	139		70		115	-

DN12: Ref. A800108/A800208