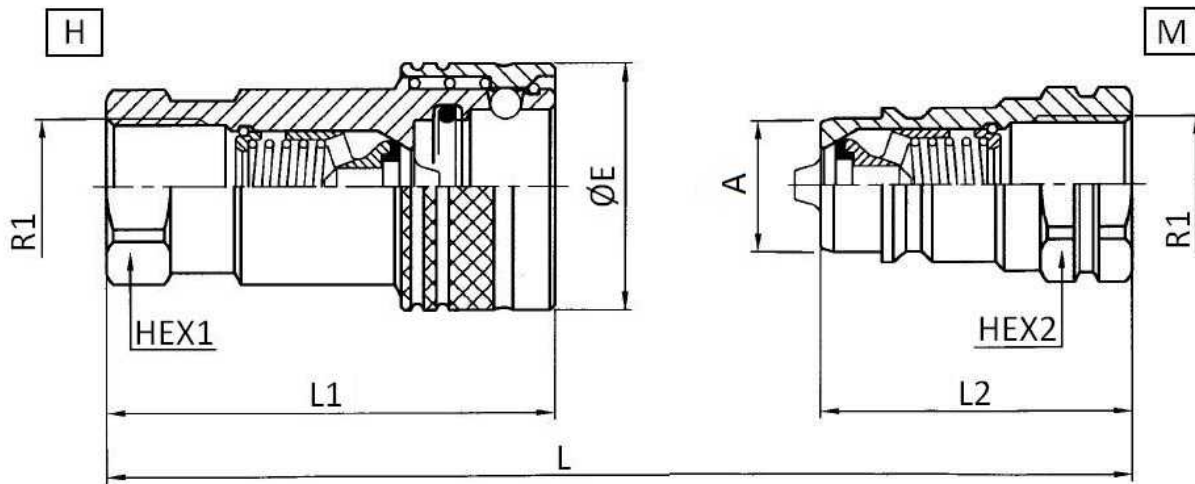


**NPT Quick release couplings NV1 serie**

Mild Steel

**1/1****Material:** Steel**Seals:** NBR**Working temperature:** -25°C / +100°C**Working pressure:** 100-400 bar

| Part n°        | R1        | Working Pressure (bar) | ISO size | BG size | Coupling | Water flow(l/min) | FLOW MAX (l/min) | L     | L1   | L2   | HEX 1 | HEX 2 | ØE  | A    |
|----------------|-----------|------------------------|----------|---------|----------|-------------------|------------------|-------|------|------|-------|-------|-----|------|
| <b>A821104</b> | 1/4" NPT  | 400                    | 6,3      | 1       | M        | 12                | 24               | 76,3  |      | 38   |       | 19    |     | 14,2 |
| <b>A821106</b> | 3/8" NPT  | 350                    | 10       | 2       | M        | 23                | 46               | 85,5  |      | 42,5 |       | 24    |     | 19   |
| <b>A821112</b> | 3/4" NPT  | 250                    | 19       | 4       | M        | 106               | 190              | 114,5 |      | 57   |       | 34    |     | 26   |
| <b>A821116</b> | 1" NPT    | 250                    | 25       | 5       | M        | 189               | 250              | 131,5 |      | 65,5 |       | 41    |     | 31,3 |
| <b>A821120</b> | 1"1/4 NPT | 220                    | 31,5     | 6       | M        | 288               | 480              | 150,5 |      | 75   |       | 50    |     | 44   |
| <b>A821124</b> | 1"1/2 NPT | 200                    | 40       | 7       | M        | 379               | 700              | 167,5 |      | 83,5 |       | 60    |     | 53,4 |
| <b>A821132</b> | 2" NPT    | 100                    | 50       | 8       | M        | 757               | 1.000            | 177,5 |      | 88,5 |       | 70    |     | 82   |
| <b>A821204</b> | 1/4" NPT  | 400                    | 6,3      | 1       | H        | 12                | 24               | 76,3  | 55,5 |      | 19    |       | 27  | -    |
| <b>A821206</b> | 3/8" NPT  | 350                    | 10       | 2       | H        | 23                | 46               | 85,5  | 63   |      | 24    |       | 34  | -    |
| <b>A821212</b> | 3/4" NPT  | 250                    | 19       | 4       | H        | 106               | 190              | 114,5 | 86   |      | 34    |       | 47  | -    |
| <b>A821216</b> | 1" NPT    | 250                    | 25       | 5       | H        | 189               | 250              | 131,5 | 99   |      | 41    |       | 52  | -    |
| <b>A821220</b> | 1"1/4 NPT | 220                    | 31,5     | 6       | H        | 288               | 480              | 150,5 | 117  |      | 50    |       | 70  | -    |
| <b>A821224</b> | 1"1/2 NPT | 200                    | 40       | 7       | H        | 379               | 700              | 167,5 | 128  |      | 60    |       | 84  | -    |
| <b>A821232</b> | 2" NPT    | 100                    | 50       | 8       | H        | 757               | 1.000            | 177,5 | 139  |      | 70    |       | 115 | -    |