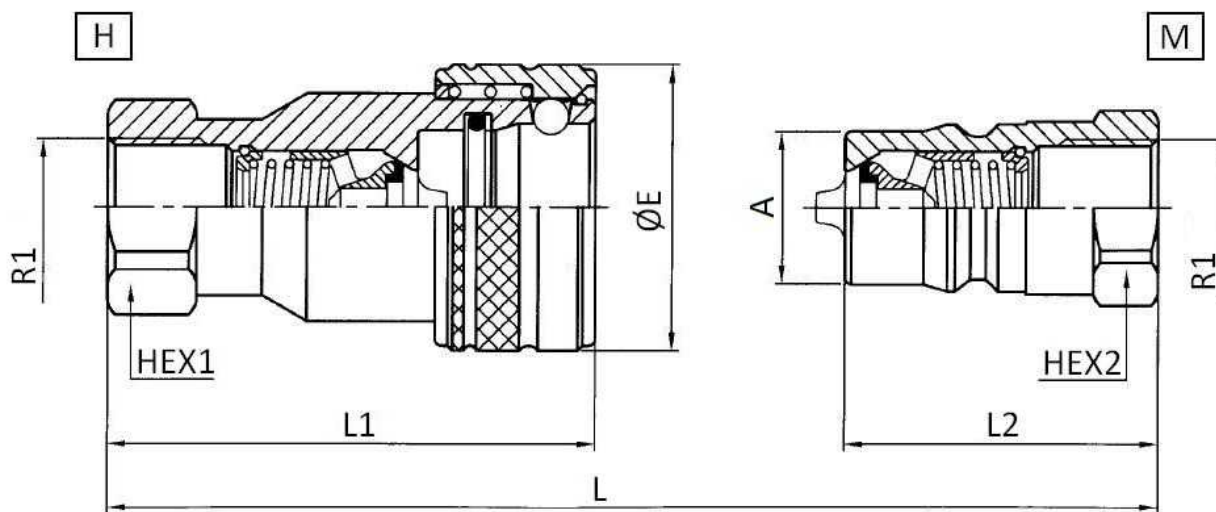


ISO 7241-B NPT Quick release couplings

Mild Steel

1/1**Material:** Steel**Seals:** NBR**Working temperature:** -25°C / +100°C**Working pressure:** 50-500 bar

Part nº	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A810302	1/8" NPT	500	5	0	M	3	9	64.1		32		14		10.9
A810304	1/4" NPT	250	6,3	1	M	12	24	76,5		38		19		14,2
A810306	3/8" NPT	250	10	2	M	23	46	85,5		42,5		22		19,1
A810308	1/2" NPT	250	12,5	3	M	45	90	96,5		48		27		23,5
A810312	3/4" NPT	250	20	4	M	106	220	114,5		57		34		31,4
A810316	1" NPT	200	25	5	M	189	260	132		65,5		41		37,7
A810320	1"1/4 NPT	200	40	7	M	379	757	201.5		127		65		44.45
A810324	1"1/2 NPT	200	40	7	M	379	757	201.5		127		65		44.45
A810332	2" NPT	100	50	8	M	757	1.000	221		142		90		63.2
A810402	1/8" NPT	500	5	0	H	3	9	64.1	50,7		17		23	
A810404	1/4" NPT	250	6,3	1	H	12	24	76,5	60		19		28	-
A810406	3/8" NPT	250	10	2	H	23	46	85,5	67,2		22		35	-
A810408	1/2" NPT	250	12,5	3	H	45	90	96,5	75,7		27		44	-
A810412	3/4" NPT	250	20	4	H	106	220	114,5	91,5		34		52	-
A810416	1" NPT	200	25	5	H	189	260	132	105,8		41		60	-
A810420	1"1/4 NPT	200	40	7	H	379	757	201.5	126,5		65		78,6	-
A810424	1"1/2 NPT	200	40	7	H	379	757	201.5	126,5		65		78,6	-
A810432	2" NPT	100	50	8	H	757	1.000	221	142		90		105	-