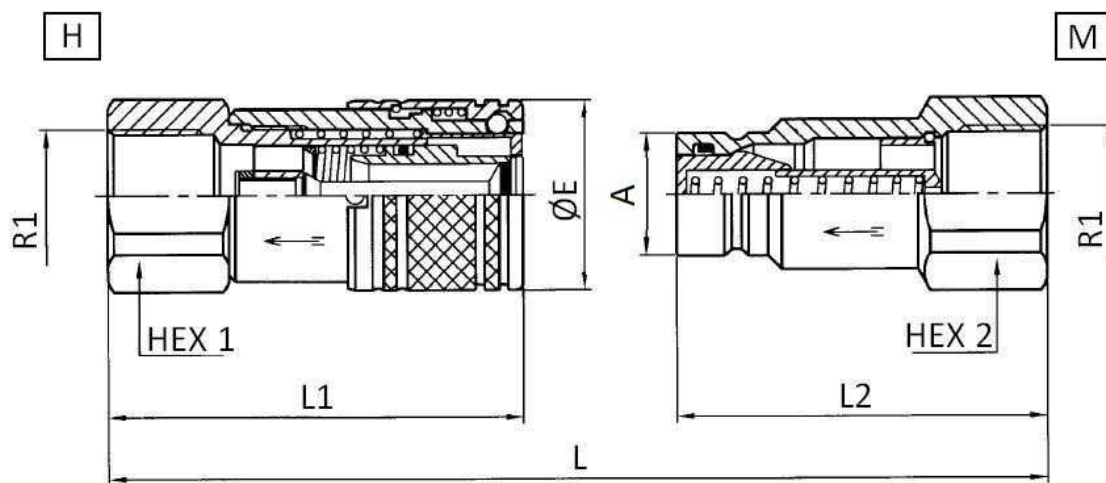


BSP Ecological flat face coupling-- ISO16028

Mild Steel

1/1

**Material:** Steel**Seals:** NBR**Working temperature:** -25°C / +100°C**Working pressure:** 250-300 bar**ISO 16028**

Part n°	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A900104	1/4" BSP	300	6,3	1	M	12	24	100		52		22	28	16,2
A900106	3/8" BSP	250	10	2	M	23	46	111,5		63,5		27	32	19,76
A900108	1/2" BSP	250	10	2	M	23	46	124,1		67,5		27	32	19,76
A90011208	1/2" BSP	250	12,5	3	M	45	90	168,5		72,5		36	38	24,55
A900112	3/4" BSP	250	12,5	3	M	45	90	141,2		74,5		36	38	24,55
A900116	1" BSP	250	19	4	M	100	200	157,5		86		41	48	29,95
A900120	1"1/4 BSP	250	25	5	M	189	280	177		90		50	55	36
A900124	1" 1/2 BSP	250	40	7	M	379	700	210		119,5		70	78,5	57,05
A900132	2" BSP	250	50	8	M	757	1.000	283		173		90	103	72,9
A900204	1/4" BSP	300	6,3	1	H	12	24	100	58,5		22		28	-
A900206	3/8" BSP	250	10	2	H	23	46	111,5	67,3		27		32	-
A900208	1/2" BSP	250	10	2	H	23	46	124,1	72,3		27		32	-
A90021208	1/2" BSP	250	12,5	3	H	45	90	168,3	78,5		32		38	-
A900212	3/4" BSP	250	12,5	3	H	45	90	141,2	84		36		38	-
A900216	1" BSP	250	19	4	H	100	200	157,5	93,6		46		48	-
A900220	1"1/4 BSP	250	25	5	H	189	280	177	109,3		50		55	-
A900224	1"1/2 BSP	250	40	7	H	379	700	210	118,3		70		78,5	-
A900232	2" BSP	250	50	8	H	757	1.000	283	147,4		90		103	