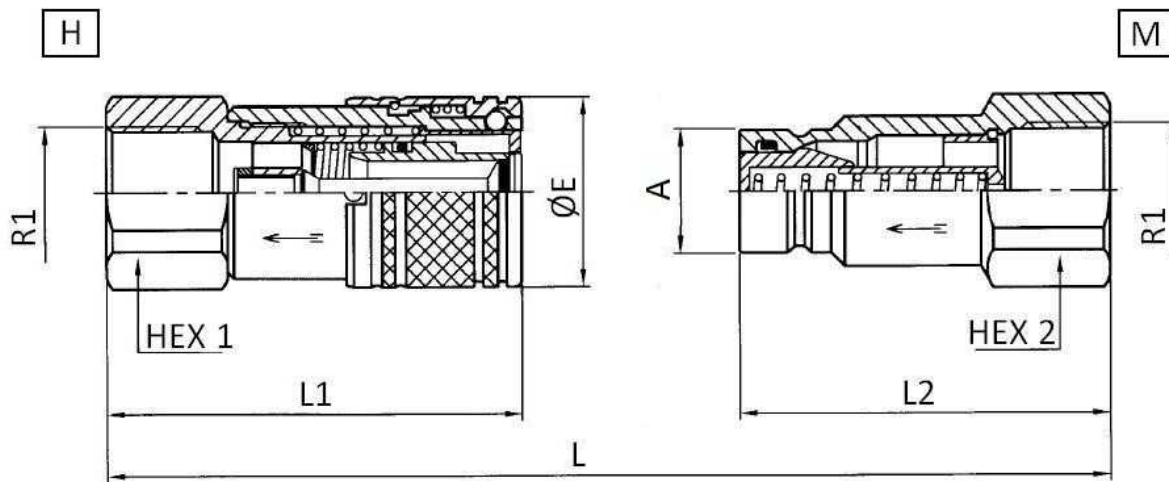


NPT Ecological flat face coupling

Mild Steel

1/1**Material:** Steel**Seals:** NBR**Working temperature:** -25°C / +100°C**Working pressure:** 200-300 bar**ISO 16028**

Part nº	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow (l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A901104	1/4" NPT	300	6,3	1	M	12	24	100		52		22		16,2
A901106	3/8" NPT	250	10	2	M	23	46	115,3		63,5		27		19,7
A901108	1/2" NPT	250	10	2	M	23	46	124,3		67,5		27		19,7
A901112	3/4" NPT	250	12,5	3	M	45	90	140,7		74		36		24,5
A901116	1" NPT	250	19	4	M	100	200	157,5		86		41		30
A901120	1"1/4 NPT	250	25	5	M	189	280	177		90		50		36
A901204	1/4" NPT	300	6,3	1	H	12	24	100	58,5		22		28	16,2
A901206	3/8" NPT	250	10	2	H	23	46	115,3	67,5		27		32	19,7
A901208	1/2" NPT	250	10	2	H	23	46	124,3	72,5		27		32	19,7
A901212	3/4" NPT	250	12,5	3	H	45	90	140,7	84		36		38	24,5
A901216	1" NPT	250	19	4	H	100	200	157,5	93,6		46		48	30
A901220	1"1/4 NPT	250	25	5	H	189	280	177	109,3		50		55	36