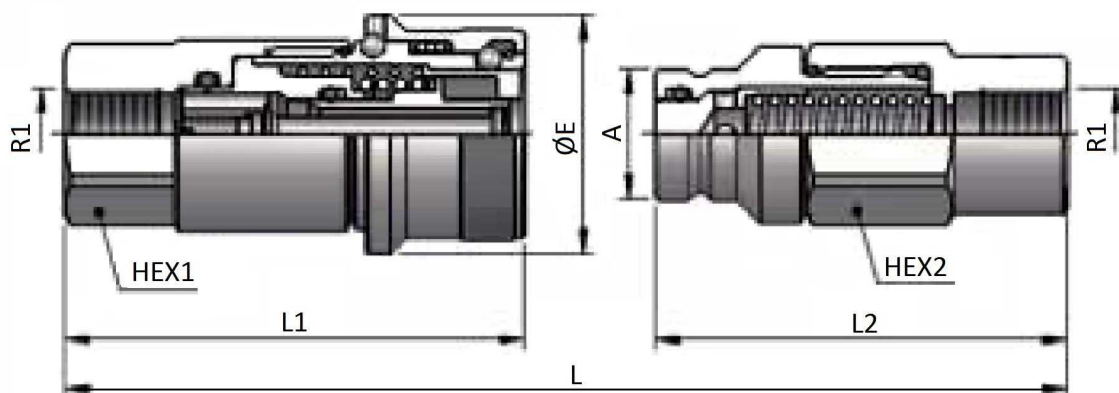


Flat face quick release coupling inner threads (UNF thread)

Mild Steel

1/1

**Material: Zn – Fe (Cr III) / Zn
- Ni****Joints: NBR****Working temperature: -25°C
/ +100°C****ISO 16028**

Part nº	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A87110906	9/16"-18h UNF	700	6,3	1	M	12	24	100,5		52		22		16,2
A87110913	9/16"-18h UNF	350	10	2	M	23	46	116,8		60,5		30		19,8
A87111213	3/4"-16h UNF	350	10	2	M	23	46	115,8		60,5		30		19,8
A87111420	7/8"-14h UNF	350	12,5	3	M	45	90	138,2		74		36		24,6
A87111722	1"1/16-12h UNF	350	16	4A	M	74	150	142,7		74		36		27
A87111725	1"1/16-12h UNF	350	19	4	M	100	200	159,5		86		41		30
A87120906	9/16"-18h UNF	700	6,3	1	H	12	24	100,5	52		22		28	
A87120913	9/16"-18h UNF	350	10	2	H	23	46	116,8	72		30		32	
A87121213	3/4"-16h UNF	350	10	2	H	23	46	115,8	73,5		30		32	
A87121420	7/8"-14h UNF	350	12,5	3	H	45	90	138,2	81,5		36		38	
A87121722	1"1/16-12h UNF	350	16	4A	H	74	150	142,7	86		36		42	27
A87121725	1"1/16-12h UNF	350	19	4	H	100	200	159,5	95		41		48	