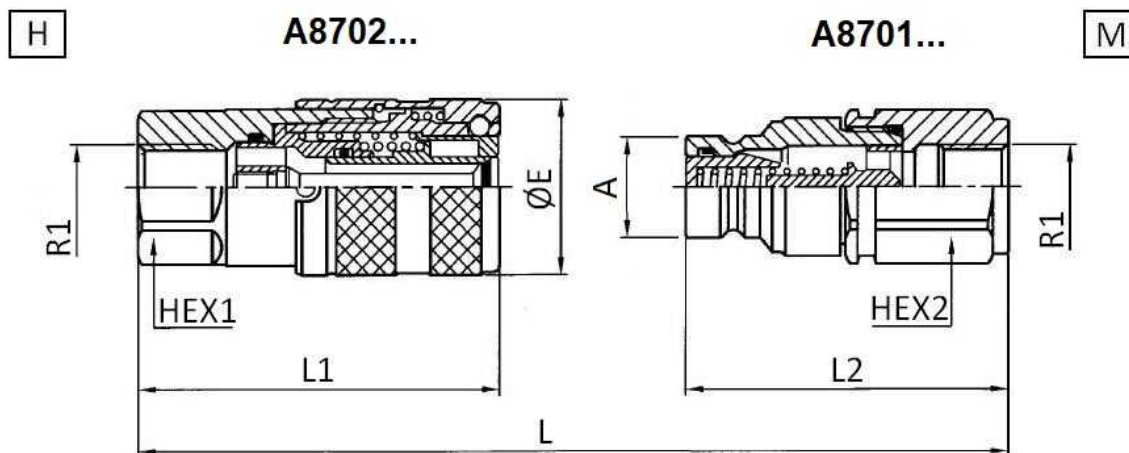


Flat face quick release coupling inner threads BSP

Mild Steel

1/1

**Material:** Steel**Seals:** NBR**Working temperature:** -25°C / +100°C**ISO 16028**

Part nº	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A870104	1/4" BSP	400	6,3	1	M	12	24	100	-	52	-	22	-	16,2
A870106	3/8" BSP	350	10	2	M	23	46	131,3	-	73,5	-	30	-	19,8
A870108	1/2" BSP	350	10	2	M	23	46	131,3	-	73,5	-	30	-	19,8
A87011208	1/2" BSP	350	12,5	3	M	45	90	138,7	-	72,5	-	36	-	24,5
A870112	3/4" BSP	350	12,5	3	M	45	90	140,7	-	74,5	-	36	-	24,6
A87011612	3/4" BSP	350	16	4A	M	100	200	113,2	-	75	-	36	-	27
A870116	1" BSP	350	19	4	M	100	200	162	-	86	-	41	-	30
A870120	1"1/4 BSP	350	25	5	M	189	280	176,5	-	90	-	55	-	36
A870204	1/4" BSP	400	6,3	1	H	12	24	100	58,5	-	22	-	28	-
A870206	3/8" BSP	350	10	2	H	23	46	131,3	73,5	-	30	-	32	-
A870208	1/2" BSP	350	10	2	H	23	46	131,3	73,5	-	30	-	32	-
A87021208	1/2" BSP	350	12,5	3	H	45	90	140,7	83,5	-	36	-	38	-
A870212	3/4" BSP	350	12,5	3	H	45	90	140,7	83,5	-	36	-	38	-
A87021612	3/4" BSP	350	16	4A	H	100	200	113,2	86	-	36	-	42	-
A870216	1" BSP	350	19	4	H	100	200	162	97,5	-	41	-	48	-
A870220	1"1/4 BSP	350	25	5	H	189	280	176,5	109,3	-	50	-	55	-