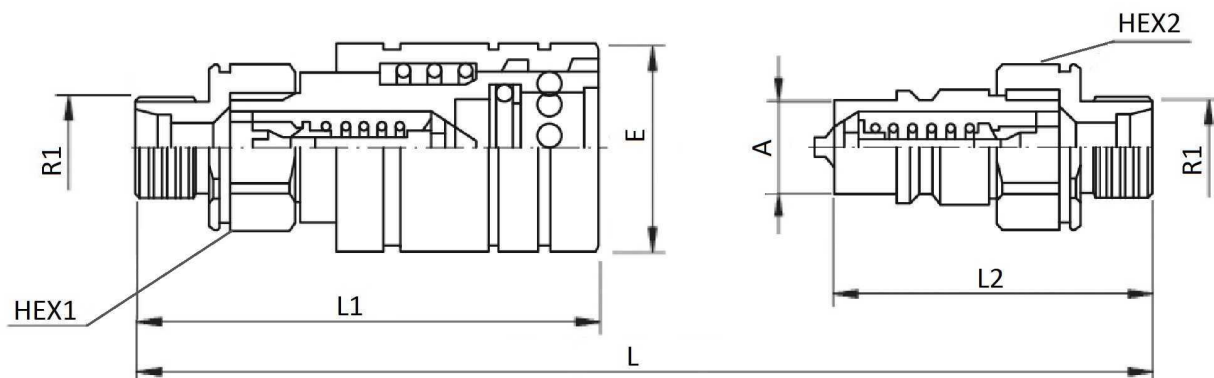


**Push-Pull quick release coupling agric.application
Met. M ISO A**

Mild Steel

1/1**Material: Zn – Fe (Cr III)****Joints: NBR****Working temperature: -25°C
/ +100°C**

Part n°	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A89111408	M14X1.5-8L	300	10	2	M	23	46	116		49		22		17,3
A89111610	M16X1.5-10L	300	10	2	M	23	46	116		49		22		17,3
A89111812	M18X1.5-12L	250	12,5	3	M	45	90	131		59		30		20,5
A89112012	M20X1.5-12S	250	12,5	3	M	45	90	131		59		30		20,5
A89112215	M22X1.5-15L	250	12,5	3	M	45	90	131		59		30		20,5
A89112618	M26X1.5-18L	250	19	4	M	106	190	161,3		67		36		29,1
A89113022	M30X2-22L	250	19	4	M	106	190	161,3		67		36		29,1
A89121408	M14X1.5-8L	300	10	2	H	23	46	116	67		22		31	
A89121610	M16X1.5-10L	300	10	2	H	23	46	116	67		22		31	
A89121812	M18X1.5-12L	250	12,5	3	H	45	90	131	72		30		38	
A89122012	M20X1.5-12S	250	12,5	3	H	45	90	131	72		30		38	
A89122215	M22X1.5-15L	250	12,5	3	H	45	90	131	72		30		38	
A89122618	M26X1.5-18L	250	19	4	H	106	190	161,3	94,3		36		46	
A89123022	M30X2-22L	250	19	4	H	106	190	161,3	94,3		36		46	