


2 Ways ball valve BSP female

Mild Steel

1/1

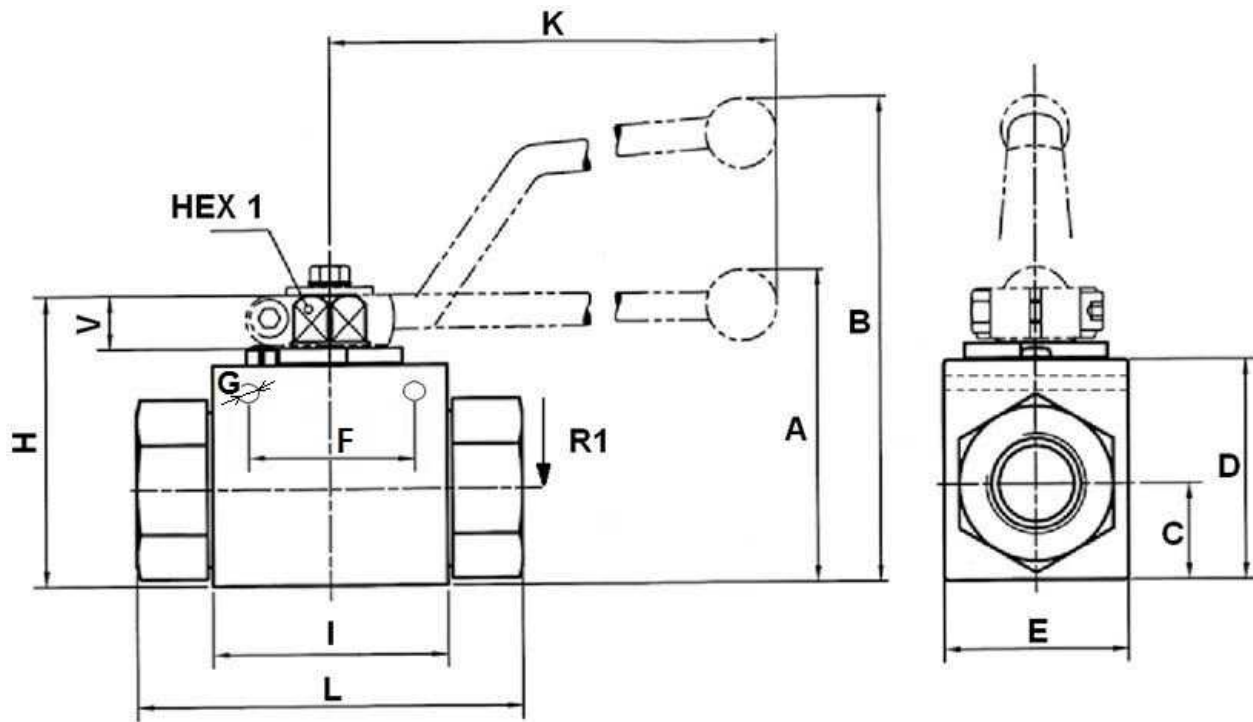

Lever: Zn

Tmin/Tmax: -20°C/+100°C

Standard o-ring: NBR

Ball seat: POM (polyoxy
methylene)

Part n°	DN	R1	MAX. PRESSURE (bar)	HEX 1	ØG	A	B	C	D	E	H	I	K	L	V
BKH G 1/8	4	1/8" BSP	500	9	4,3	-	82	13,5	33	26	47	40	115	69	11
BKH G 1/4	6	1/4" BSP	500	9	4,3	-	82	13,5	33	26	47	40	115	69	11
BKH G 3/8	10	3/8" BSP	500	9	4,3	-	86	17,5	38	32	52	43	115	72	11
BKH G 1/2	13	1/2" BSP	500	9	4,3	-	89	19	40	35	54	48	115	83	11
BKH G 3/4	20	3/4" BSP	420	14	6,2	79	-	24,5	57	49	75	62	200	95	14
BKH G 1	25	1" BSP	315	14	6,3	87	-	29,5	65	58	83	66	200	113	14
BKH G 1 1/4 DN25	25	1"1/4 BSP	315	14	-	87	-	29,5	65	58	83	66	200	120	14
BKH G 1 1/2 DN25	25	1"1/2 BSP	315	14	-	87	-	29,5	65	58	83	66	200	130	14

Fixation holes included from 1/8" BSP to 1" BSP

1/8" - 1/4": F=31mm

3/8" - 1/2": F=32mm

3/4" - 1" : F=44mm