


Ball-valves: tube conection L serie DIN 2353 full bore

Mild Steel

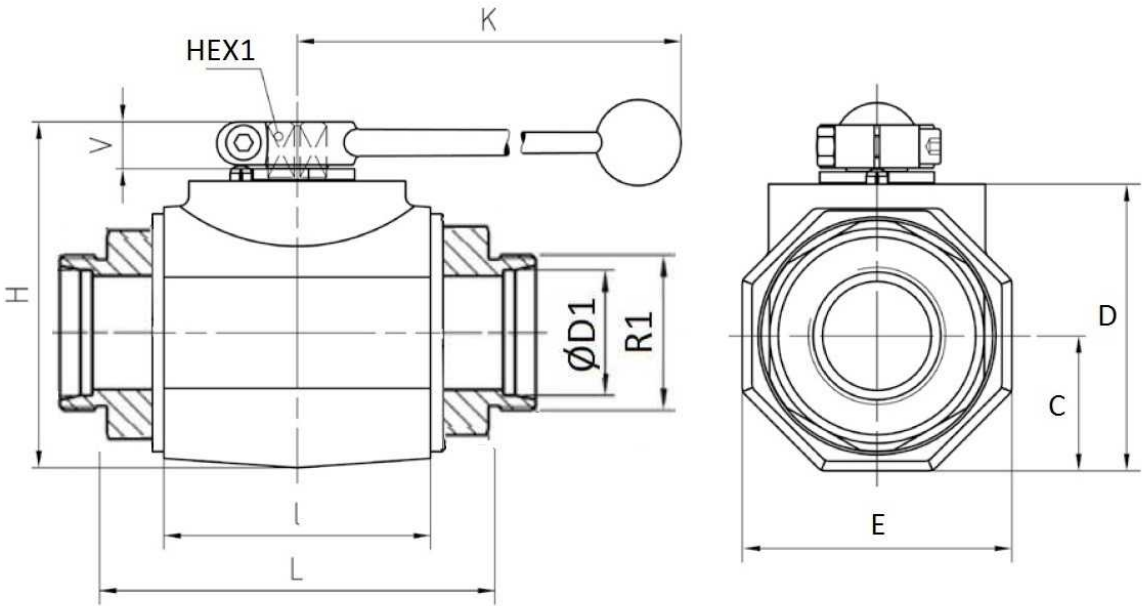

Lever: Zn

Tmin/Tmax: -20°C/+100°C

Part nº	DN	ØD1	R1	MAX. PRESSURE (bar)	HEX 1	C	D	E	H	I	K	L	V
BKH 35 L DN32	32	35L	M45X2	350	14	29,5	65	58	83	66	200	112	14
BKH 42 L DN40	40	42L	M52x2	350	14	29,5	65	58	83	66	200	112	14