


Ball-valves: tube conecction S serie DIN 2353 full bore

Mild Steel

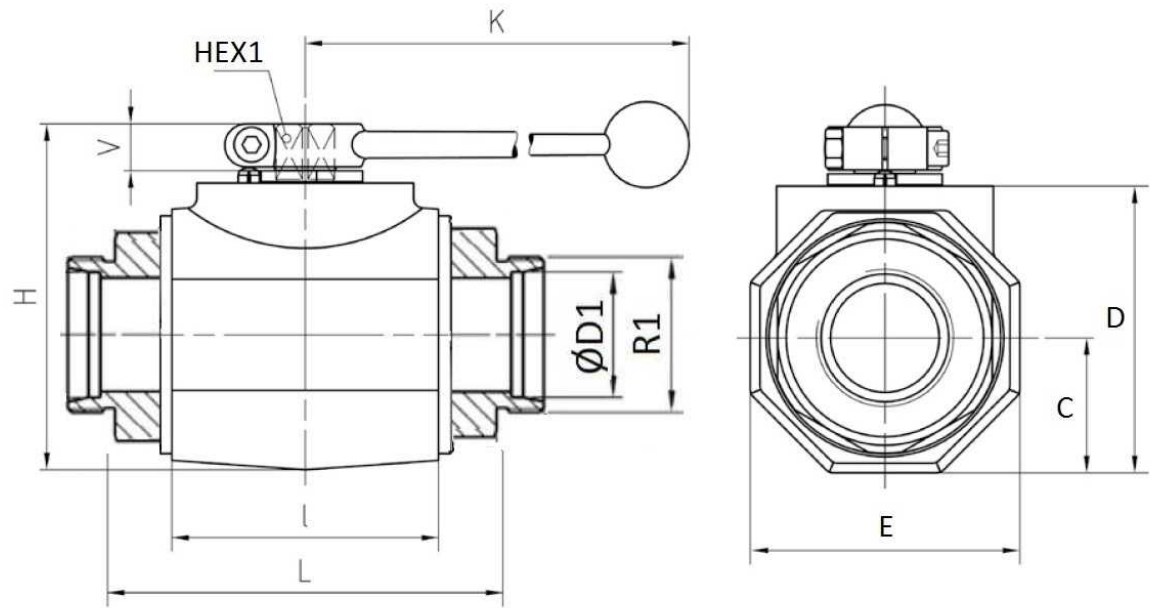

Lever: Zn

Tmin/Tmax: -20°C/+100°C

Part nº	DN	ØD1	R1	MAX. PRESSURE (bar)	HEX 1	C	D	E	H	I	K	L	V
BKH 38 S DN32	32	38S	M52x2	420	14	29,5	65	58	83	66	200	124	14