


6 Way diverter BSP female

Mild Steel

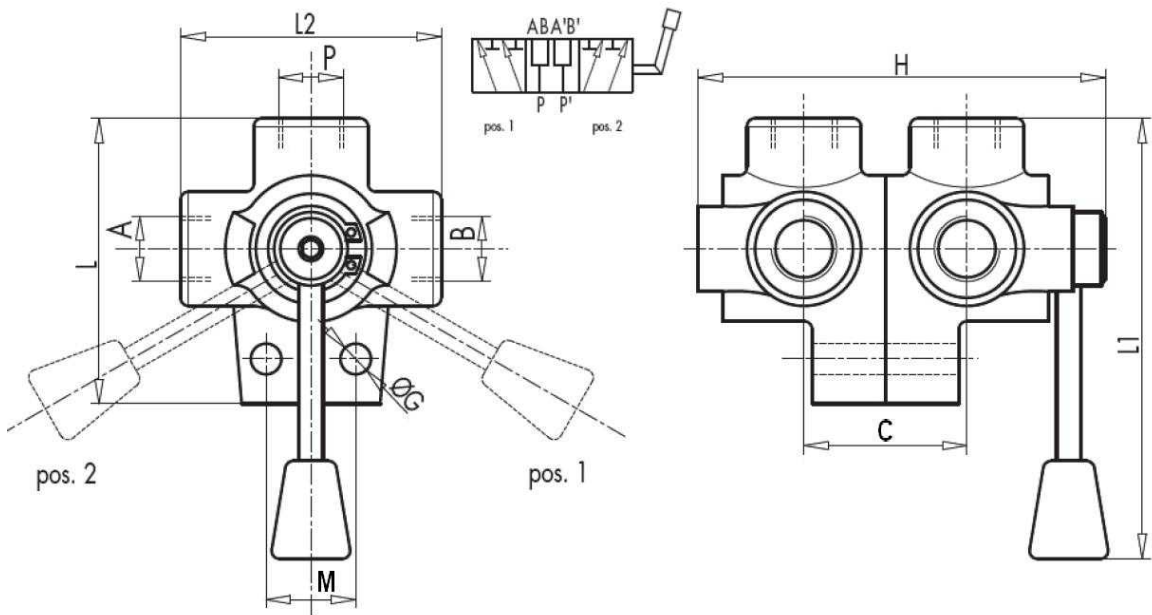

A= B = P = R1

Part nº	R1	FLOW MAX (l/min)	MAX. PRESSURE (bar)	L	L1	L2	ØG	C	H	M
D6V14	1/4" BSP	40	315	78,5	169	73	11	42	124	24
D6V38	3/8" BSP	60	315	78,5	169	73	8,5	42	124	24
D6V12	1/2" BSP	90	250	96	170	85	11	48	140	30
D6V34	3/4" BSP	120	220	100	173	91	11	50	160	32