



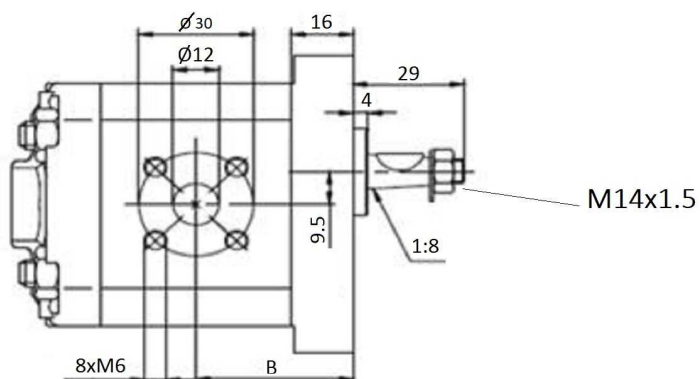

Rotation reference: BTD...I=Rotation left
BTD...D=Rotation right
Min 600 rpm

Flange and cover: Alluminum

Part n°	cm ³ / rev	Max. Press. (bar)	Max. Peak press.	R.P.M.	A	B
BTD111D03	1,1	250	300	6000	75	33
BTD116D03	1,6	250	300	6000	78	35
BTD118D03	1,8	250	300	6000	78,5	35,5
BTD127D03	2,7	250	300	6000	81	37
BTD132D03	3,2	250	300	6000	83	38
BTD137D03	3,7	250	300	4500	85	39
BTD148D03	4,8	200	250	4000	89	41

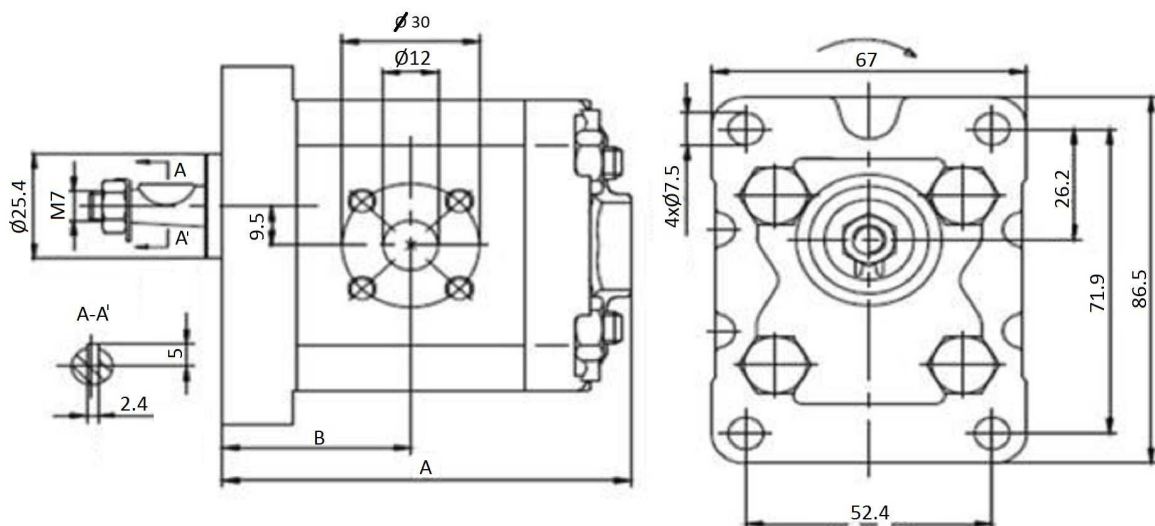

Gear pumps

Gear pumps Group I Right

**Gr.I Gear pump/ Eur.flange/tapered shaft 1:8
/side ports type German**

Page: 2/2

Part n°	cm ³ / rev	Max. Press. (bar)	Max. Peak press.	R.P.M.	A	B
BTD158D03	5,8	200	250	3500	93	43
BTD163D03	6,3	200	250	2900	95	44
BTD180D03	8	200	250	2100	101	47

(*) R1 = inlet, R2 = outlet
DECIBELS: 75dB
Tightening torque 25-30 Nm