


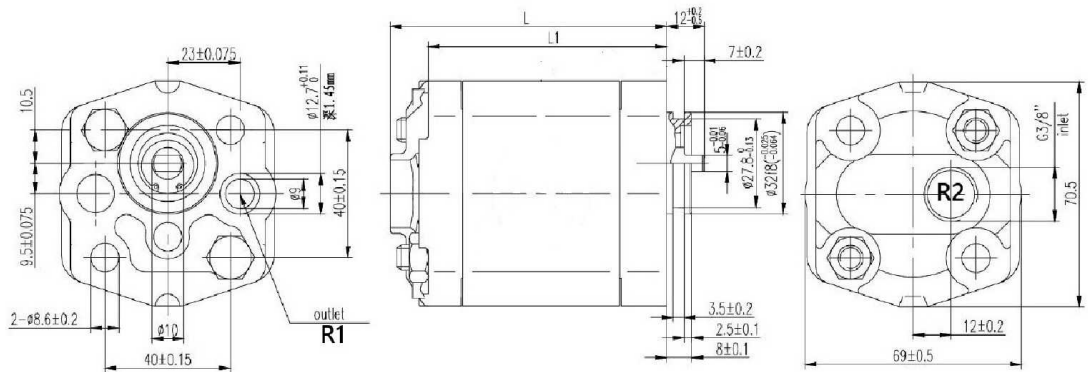

Min 600 rpm

Flange and cover: Alluminum

CW / Clockwise rotation

Part n°	R1	R2	Max. Press. (bar)	Max. Peak press.	R.P.M.	cm³ / rev	A	B
BTD111D05	9 mm	3/8" BSP	200	250	6000	1.1	74	63
BTD121D05	9 mm	3/8" BSP	200	250	6000	2.1	78	67
BTD132D05	9 mm	3/8" BSP	200	250	5000	3.2	82	71
BTD142D05	9 mm	3/8" BSP	200	250	4000	4.2	86	75
BTD158D05	9 mm	3/8" BSP	160	200	2900	5.8	92	81
BTD170D05	9 mm	3/8" BSP	160	200	2900	7.0	92	81
BTD180D05	9 mm	3/8" BSP	160	200	2100	8.0	100	89
BTD198D05	9 mm	3/8" BSP	160	200	2100	9.8	100	89

(*) R2 = inlet, R1 = outlet
Tightening torque 25-30 Nm