
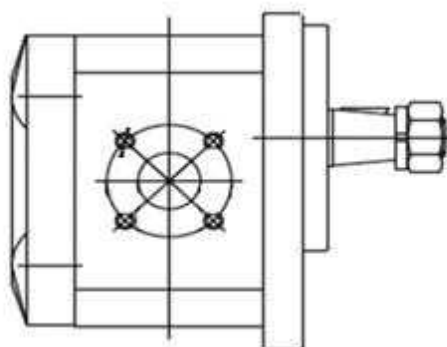

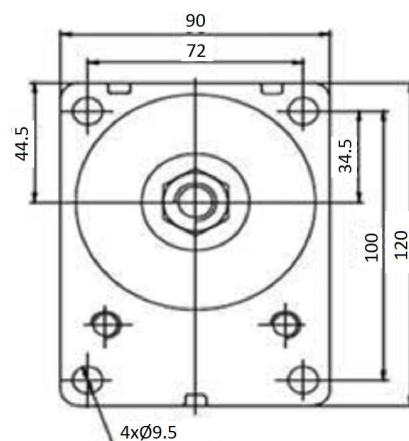


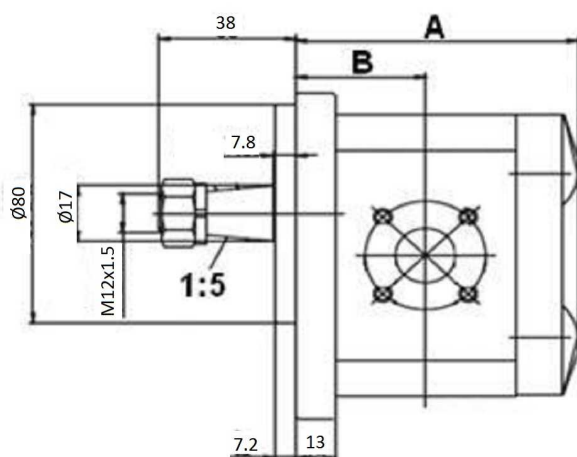

Pressure: ØE = 15 ; X = M6

Rotation reference: BTD...I=Rotation left
 BTD...D=Rotation right
 Min 500 rpm

Flange and cover: Cast iron

Part n°	Ø ASPIRATION (mm)	Ø PRESSURE (mm)	Max. Press. (bar)	Max. Peak press.	R.P.M.	cm³ / rev	ØA	ØB	ØD	A	B	W
BTD260I04	40	35	250	300	3500	6 CC	40	35	15	99	45	M6
BTD280I04	40	35	250	300	3500	8 CC	40	35	20	102	46,5	M6
BTD2120I04	40	35	250	300	3500	12 CC	40	35	20	108	49,5	M6
BTD2280I04	40	30	160	200	3000	28 CC	40	30	20	133	62	M8
BTD2140I04	40	35	250	300	3500	14 CC	40	35	20	111	51	M6
BTD2160I04	40	35	250	300	3500	16 CC	40	35	20	114	52,5	M6
BTD2200I04	40	35	250	300	3500	20 CC	40	35	20	121	56	M6



Gear pumps

Gear pumps Group II Left

Bosch Cov./Bosch Fl./Conical 1:5 Gr.II

Page: 2/2

Part n°	Ø ASPIRATION (mm)	Ø PRESSURE (mm)	Max. Press. (bar)	Max. Peak press.	R.P.M.	cm ³ / rev	ØA	ØB	ØD	A	B	W
BTD2230I04	40	35	200	250	3000	23 CC	40	35	20	125,5	58,3	M6
BTD2250I04	40	35	200	250	3000	25 CC	40	35	20	128	59,5	M6

ØA, ØD, W = Inlet
ØB, ØE, X = Outlet