

Solenoid valves


NG6 Solenoid valve

NG6 Solenoid valve - spool no.3B





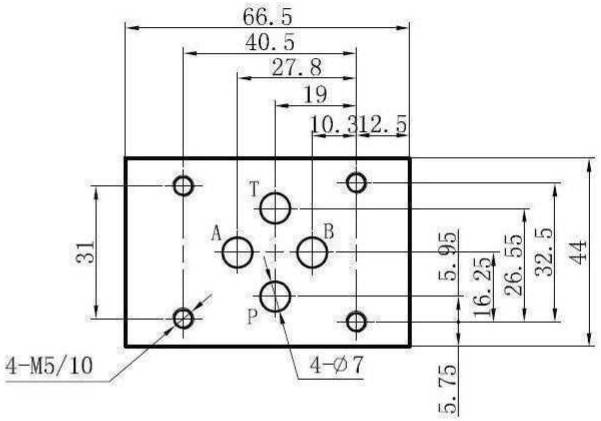

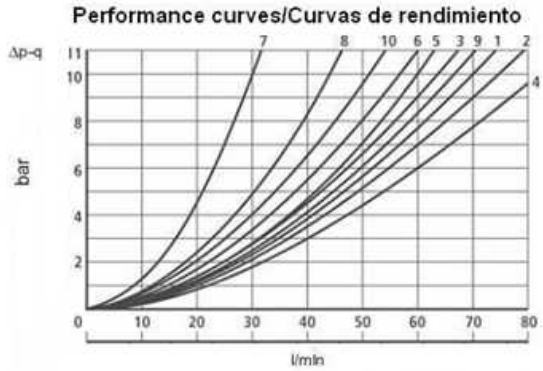

Spool / Corredera	Flow path/Trayectoria flujo			
	P – A	P – B	A – T	B – T
1	3	3	1	1
2	6	6	9	9
3	2	4	2	2
6	1	1	2	1
3A	-	4	2	-
41A	3	3	-	-
51A	1	1	3	1

Electric Connectors with LED

4 Screw Set Included M5x45

Operating Pressure · A, B, P ports: 315 bar
· T port: 160 bar

Cast iron body IP 65

Part nº	Size	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	f (Hz)
KVNG6-3B-24CC H	NG-6	24 VDC	60	315	
KVNG6-3B-220CA H	NG-6	220 VAC	60	315	50

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.