
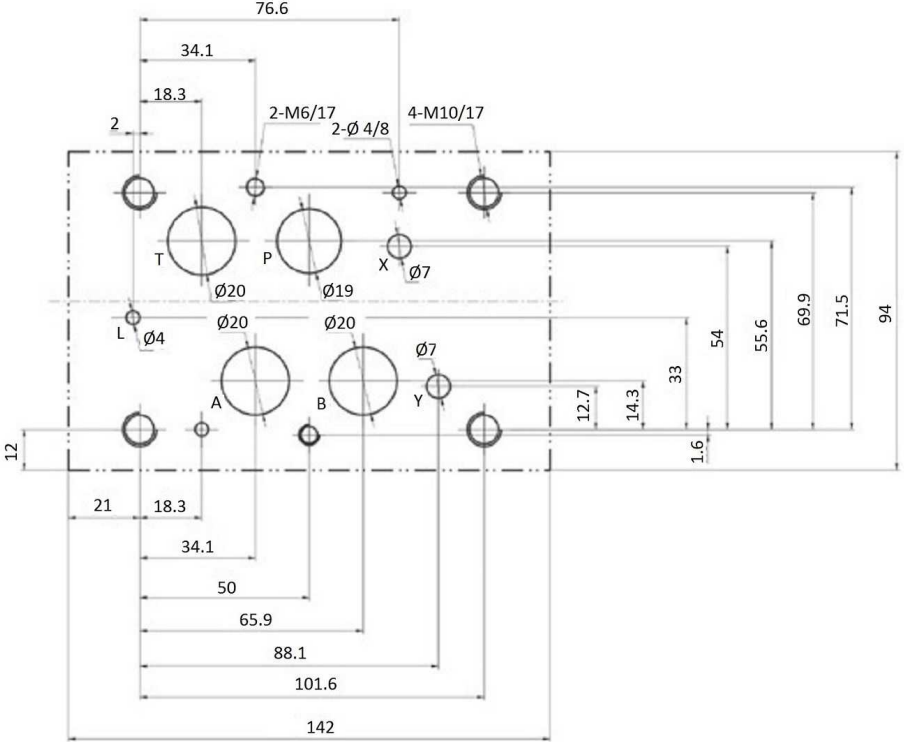


Solenoid valves
NG16 Solenoid valve
NG16 Solenoid valve - spool no.1



Max. T-pressure: 100 BAR
PLATE O-RINGS: 21.89X2.62 90º/ X,Y=12x2

Part nº	Size	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	f (Hz)
KVNG16-1-12CC H	NG-16	12 VDC	300	350	
KVNG16-1-24CC H	NG-16	24 VDC	300	350	
KVNG16-1-110CA H	NG-16	110 VAC	300	350	50
KVNG16-1-220CA H	NG-16	220 VAC	300	350	50

*** Review attached PDF***
Internal drain and oil control
It includes the piloting cartridge, it must be placed in line P.
Piloting and drainage can be modified on demand