

Solenoid valves

NG16 Solenoid valve

NG16 Solenoid valve - spool no.4





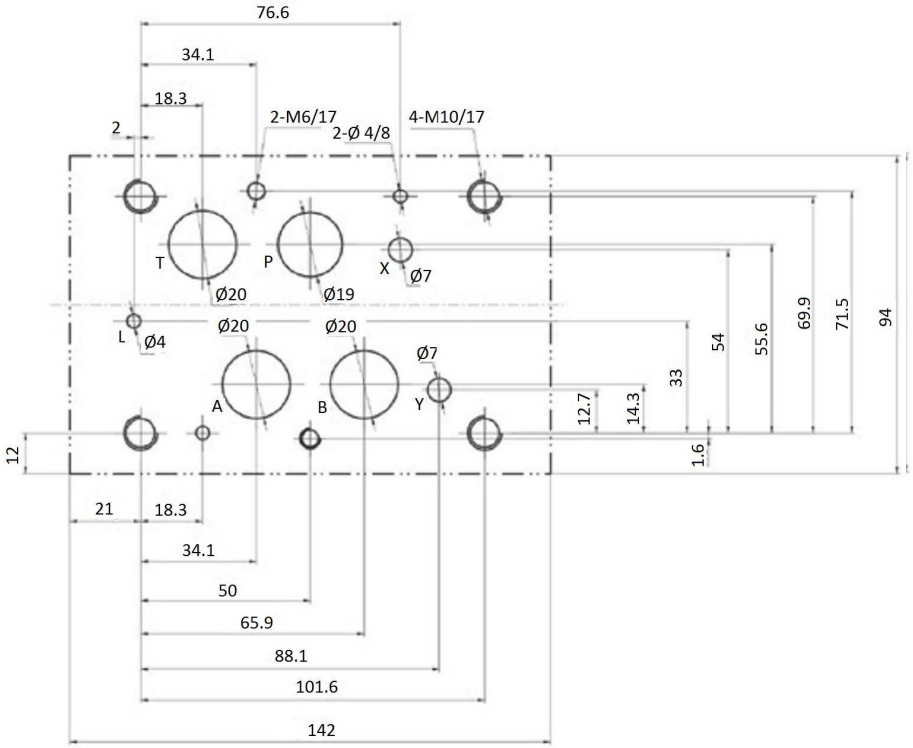

Max. T-pressure: 100 bar

O-RING PLATE: 21.89X2.62 90º/ X,Y=12x2

Part nº	Size	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	f (Hz)
KVNG16-4-12CC H	NG-16	12 VDC	300	350	
KVNG16-4-24CC H	NG-16	24 VDC	300	350	
KVNG16-4-110CA H	NG-16	110 VAC	300	350	50
KVNG16-4-220CA H	NG-16	220 VAC	300	350	50

***** Review attached PDF*****
Internal drain and oil control
It includes the piloting cartridge

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.