Gear flow dividers

Gear Flow divider without valves

Flow dividers with anti shock valves, group 2



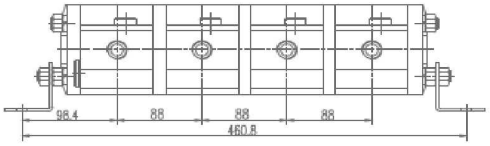



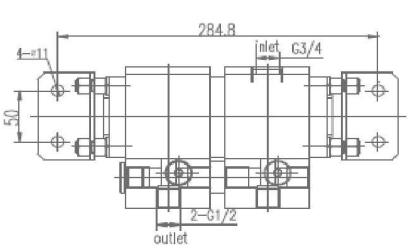

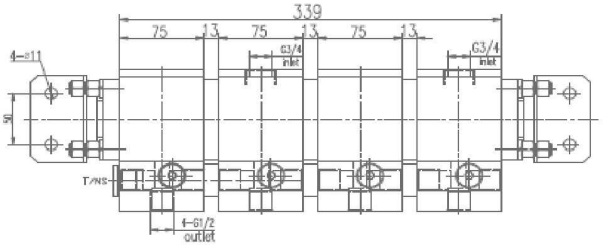





Flow accuracy ± 1.5% -- ± 2%

***Flow for body**

Minimum pressure from 6cc to 11cc: 80 bar

Minimum pressure from 12cc to 31cc: 50 bar

Part nº	*Min. flow (l/min)	*Max. flow (l/min)	Max. Press. (bar)	cm³/body	Nº bodies
DE260X2	4,8	21	250	6	2
DE260X4	4,8	21	250	6	4
DE280X2	6,4	28	250	8	2
DE280X4	6,4	28	250	8	4
DE2110X2	8,8	35	250	11	2
DE2110X4	8,8	35	250	11	4
DE2140X2	11,2	42	220	14	2
DE2140X4	11,2	42	220	14	4
DE2170X2	13,6	51	220	17	2
DE2170X4	13,6	51	220	17	4
DE2250X2	20	62.5	220	25	2
DE2250X4	20	62.5	220	25	4
DE2310X2	24,8	77.5	180	31	2
DE2310X4	24,8	77.5	180	31	4

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Gear flow dividers

Gear Flow divider without valves

Flow dividers with anti shock valves, group 2

Part nº	*Min. flow (l/min)	*Max. flow (l/min)	Max. Press. (bar)	cm³/body	Nº bodies

Group 1, inlet G1/2, outlet G3/8
Group 2, inlet G3/4, outlet G1/2

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.