


Entry section s/w by-pass and pressure relief valve





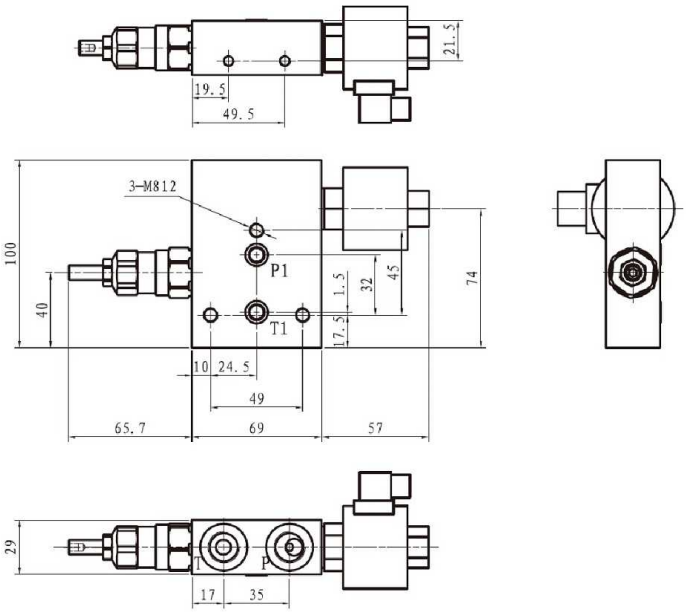



Adjustable pressure: 140-315 bar

Part nº	R1	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)
YPET-12CC H	3/8" BSP	12VDC	50	315
YPET-24CC H	3/8" BSP	24VDC	50	315
YPET-220CA H	3/8" BSP	220VAC	50	315

Tightening torque of the rods that join the valves must be 20Nm

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.