


Heat exchangers oil/air with thermostat- ICT series

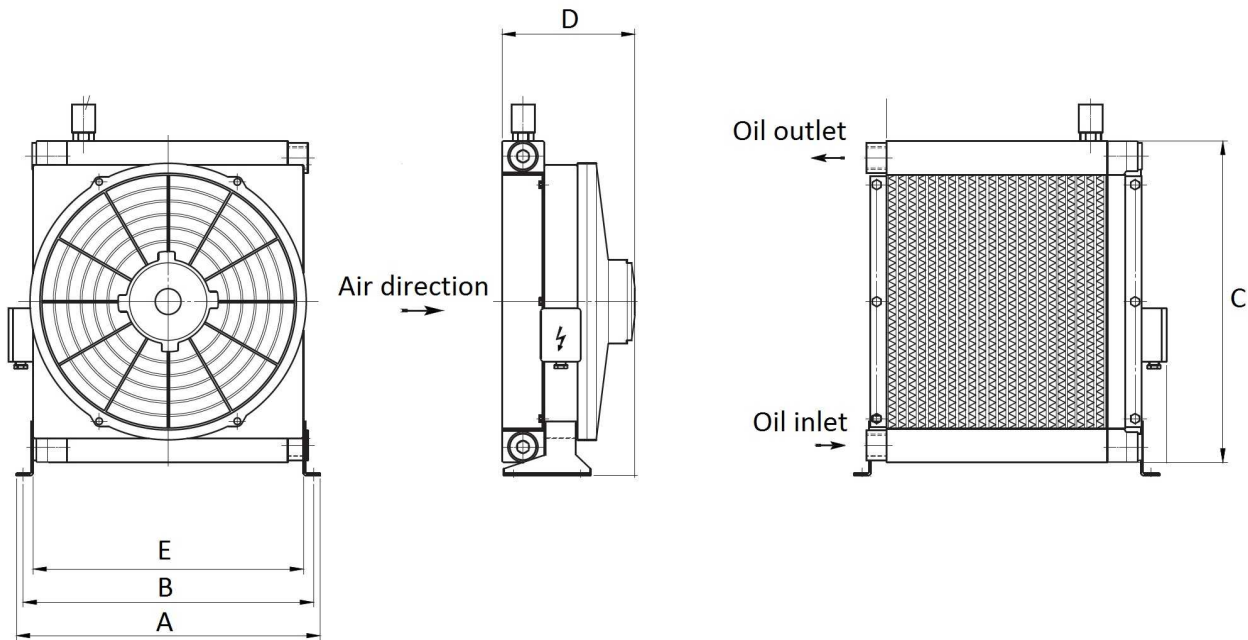

Inlet/outlet thread: 1" BSP

Part n°	Voltage (V)	Power (W)	Min. flow (l/min)	Max. flow (l/min)	Cap. (l)	Air flow (m³/h)	P(IP)	Current	Noise level db(A)	A	B	C	D	E
ICT21012VDC	12 VDC	65	10	60	1,7	500	64	5,8	75	278	258	322,5	167	227
ICT21024VDC	24 VDC	65	10	60	1,7	500	64	2,9	75	278	258	322,5	167	227
ICT25012VDC	12 VDC	190	20	80	2	1.700	68	15	79	370	345	372,5	210	320
ICT25024VDC	24 VDC	190	20	80	2	1.700	68	7,5	79	370	345	372,5	210	320
ICT250/212VDC	12 VDC	180	30	180	4	2.200	68	15	83	470	450	382,5	210	420
ICT250/224VDC	24 VDC	180	30	180	4	2.200	68	7,5	83	470	450	382,5	210	420
ICT39012VDC	12 VDC	210	50	250	5	2.500	68	20	85	465	435	480	199	405
ICT39024VDC	24 VDC	210	50	250	5	2.500	68	10	85	465	435	480	199	405

Contact temperature T247 thermostat: 47°C
Thermostat and Relay included in CC models
Maximum Working Pressure: 16 bar
Test pressure: 25 Bar