
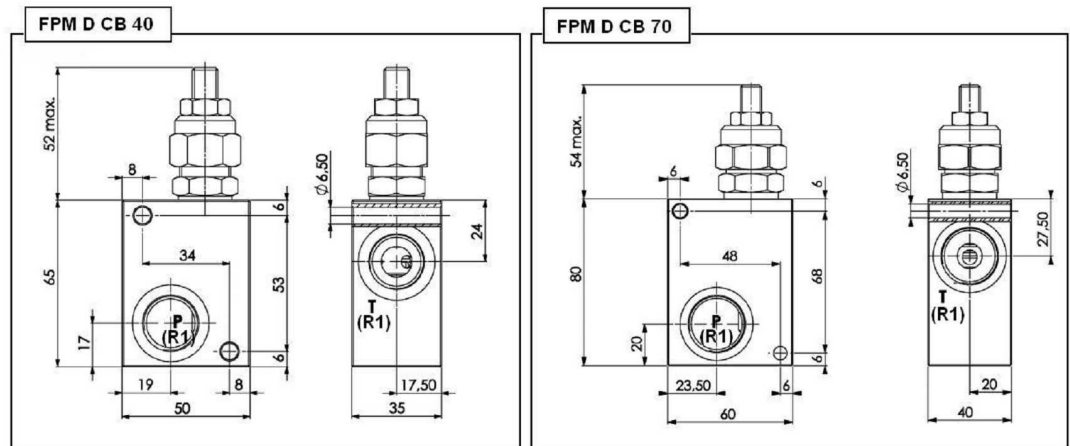



Pressure relief valve in line (screw control) 250 bar aluminium

1/1



Material: Body in aluminium. Cartridge in steel zinc plated

Max.flow: 80 l/min

Max.press: 250 bar

Adjustment means: Leakproof screw

Part nº	R1	Max. flow (l/min)	Setting (bar)	Reg. rate (bar)	Press. increase (bar/turn)	Install. torque	Cartridge weight (kg)	Cartridge +body weight	Colour
VSM D CB 40 P 3/8 05	3/8"BSP	40	5	5 - 50	10	45 - 50	0,16	0,41	Blanco / White*
FPM D CB 40 P 3/8 10	3/8"BSP	40	30	30-100	20	45 - 50	0,17	0,41	Amarillo / Yellow*
VSM D CB 40 P 3/8 10	3/8"BSP	40	30	30-100	20	45 - 50	0,16	0,41	Amarillo / Yellow*
FPM D CB 40 P 3/8 20	3/8"BSP	40	50	50-220	40	45 - 50	0,17	0,41	Verde / Green*
VSM D CB 40 P 3/8 20	3/8"BSP	40	50	50-220	40	45 - 50	0,16	0,41	Verde / Green*
VSM D CB 40 P 3/8 20-180	3/8"BSP	40	50	50-220	40	45 - 50	0,16	0,41	Verde / Green*
FPM D CB 40 P 1/2 05	1/2" BSP	40	5	5-50	10	45 - 50	0,17	0,41	Blanco / White*
VSM D CB 40 P 1/2 05	1/2" BSP	40	5	5-50	10	45 - 50	0,16	0,41	Blanco / White*
VSM D CB 40 P 1/2 10	1/2"BSP	40	30	30-100	20	45 - 50	0,16	0,41	Amarillo / Yellow*
VSM D CB 40 P 1/2 20	1/2"BSP	40	50	50-220	40	45 - 50	0,16	0,41	Verde / Green*
FPM D CB 70 P 1/2 05	1/2"BSP	80	5	5 - 50	10	70 - 80	0,29	0,73	Blanco / White*
VSM D CB 70 P 1/2 05	1/2"BSP	80	5	5 - 50	10	70 - 80	0,28	0,73	Blanco / White*
VSM D CB 70 P 1/2 10	1/2"BSP	80	30	30-100	20	70 - 80	0,28	0,73	Amarillo / Yellow*
VSM D CB 70 P 1/2 20	1/2"BSP	80	80	80-280	40	70 - 80	0,28	0,73	Verde / Green*
VSM D CB 70 P 3/4 05	3/4"BSP	80	5	5 - 50	10	70 - 80	0,28	0,73	Blanco / White*
VSM D CB 70 P 3/4 10	3/4"BSP	80	5	30-100	20	70 - 80	0,28	0,73	Amarillo / Yellow*
VSM D CB 70 P 3/4 20	3/4"BSP	80	80	80-280	40	70 - 80	0,28	0,73	Rojo/ red*

*Spring color