
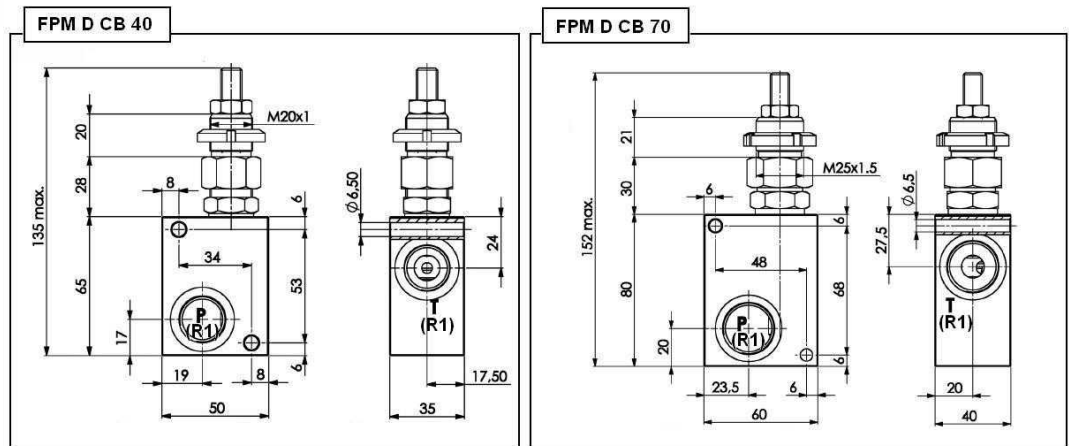



Pressure relief valve in line (steering-knob control) panel 250 bar

1/1

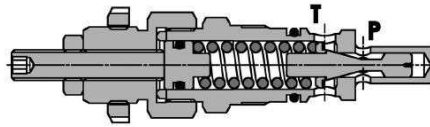

Material: Body in aluminium. Cartridge in steel zinc plated

Max.flow: 80 l/min

Max.press: 250 bar

Adjustement means: Handknob and locknut

Part n°	R1	Max. flow (l/min)	Setting (bar)	Reg. rate (bar)	Press. increase (bar/turn)	Install. torque	Cartridge weight (kg)	Cartridge +body weight	Colour
FPM D CB 40F R 3/810	3/8"BSP	40	30	30-100	20	45 - 50	0,21	0,45	Amarillo / Yellow*
FPM D CB 40F R 3/820	3/8"BSP	40	50	50-220	40	45 - 50	0,21	0,45	Verde / Green*
VSM D CB 40F R 3/805	3/8"BSP	40	5	5-50	10	45 - 50	0,21	0,45	Blanco / White*
VSM D CB 40F R 3/810	3/8"BSP	40	30	30-100	20	45 - 50	0,21	0,45	Amarillo / Yellow*
VSM D CB 40F R 3/820	3/8"BSP	40	50	50-220	40	45 - 50	0,21	0,45	Verde / Green*
VSM D CB 40F R 1/205	1/2"BSP	40	5	5-50	10	45 - 50	0,21	0,45	Blanco / White*
VSM D CB 40F R 1/210	1/2"BSP	40	30	30-100	20	45 - 50	0,21	0,45	Amarillo / Yellow*
VSM D CB 40F R 1/220	1/2"BSP	40	80	50-220	40	45 - 50	0,21	0,45	Verde / Green*
VSM D CB 70F R 1/205	1/2"BSP	80	5	5-50	10	70 - 80	0,34	0,78	Blanco / White*
VSM D CB 70F R 1/210	1/2"BSP	80	30	30-100	20	70 - 80	0,34	0,78	Amarillo / Yellow*
VSM D CB 70F R 1/220	1/2"BSP	80	50	80-280	40	70 - 80	0,34	0,78	Verde / Green*
VSM D CB 70F R 3/405	3/4"BSP	80	5	5-50	10	70 - 80	0,34	0,78	Blanco / White*
VSM D CB 70F R 3/410	3/4"BSP	80	30	30-100	20	70 - 80	0,34	0,78	Amarillo / Yellow*
VSM D CB 70F R 3/420	3/4"BSP	80	80	80-280	40	70 - 80	0,34	0,78	Verde / Green*

*Spring color