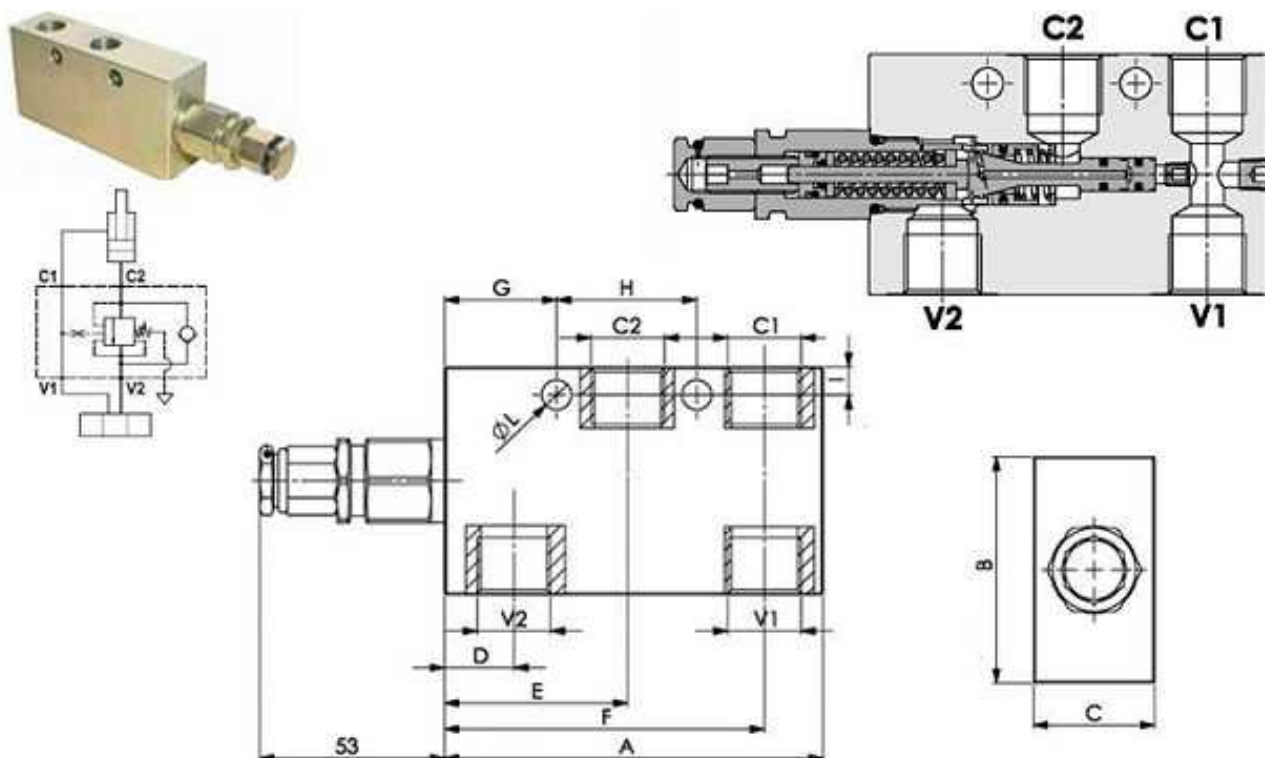


Overcenter valves

Single acting balanced overcenter valve (internal pilot)

1/1

**R1=C1, C2, V1, V2****Pilot ratio:** 1:4,25 (1 : 8 and 1: 11 on request)**I=8****Material:** Body is steel made zinc plated**Adjustment means:** Leakproof screw adjustment**Assembly:** with control valve with any spool

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Setting (bar)	Reg. rate (bar)	Press. increase (bar/turn)	A	B	C	D	E	F	G	H	L
VSOB S 1/4 LP 20	1/4" BSP	50	350	170	60 - 210	70	108	55	30	19,5	52	91	32	40	8,5
VSOB S 1/4 LP 35	1/4" BSP	50	350	280	80 - 350	120	108	55	30	19,5	52	91	32	40	8,5
VSOB S 3/8 LP 20	3/8" BSP	50	350	170	60 - 210	70	108	55	30	19,5	52	91	32	40	8,5
FPOB S 3/8 LP 35	3/8" BSP	50	350	280	80 - 350	120	108	55	30	19,5	52	91	32	40	8,5
VSOB S 3/8 LP 35	3/8" BSP	50	350	280	80 - 350	120	108	55	30	19,5	52	91	32	40	8,5
VSOB S 1/2 LP20	1/2" BSP	50	350	170	60 - 210	70	108	65	35	19,5	52	91	32	40	8,5
VSOB S 1/2 LP35	1/2" BSP	50	350	280	80 - 350	120	108	65	35	19,5	52	91	32	40	8,5