


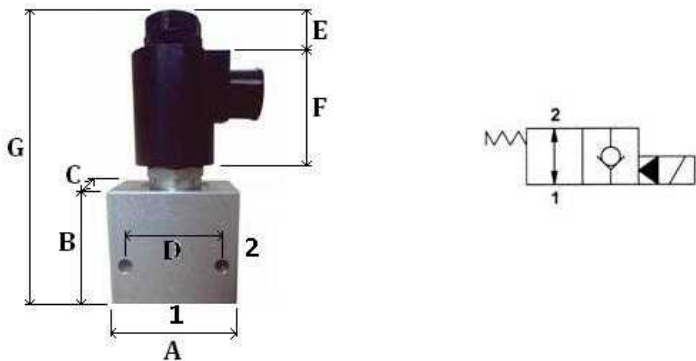

Materials: body in aluminium.
manual closing

Part nº	R1	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D	E	F	G
VCC08NA12CC	3/8" BSP	12CC	35	230	60	50	35	45	13	39	110
VCC08NA24CC	3/8" BSP	24CC	35	230	60	50	35	45	13	39	110
VCC08NA220AC	3/8" BSP	220AC	35	230	60	50	35	45	13	39	110
VCC10NA12CC	1/2" BSP	12CC	80	230	70	60	35	45	15	50	135,5
VCC10NA24CC	1/2" BSP	24CC	80	230	70	60	35	45	15	50	135,5
VCC10NA220AC	1/2" BSP	220AC	80	230	70	60	35	45	15	50	135,5
VCC12NA12CC	3/4" BSP	12CC	115	210	90	75	45	60	2	52	142
VCC12NA24CC	3/4" BSP	24CC	115	210	90	75	45	60	2	52	142
VCC12NA220AC	3/4" BSP	220AC	115	210	90	75	45	60	2	52	142

VCC... 3/4" BSP---- Connector with rectifier not included. (REF: CONLEDREC220)
 VCC... 3/8" BSP 1/2" BSP----Connector with rectifier included