


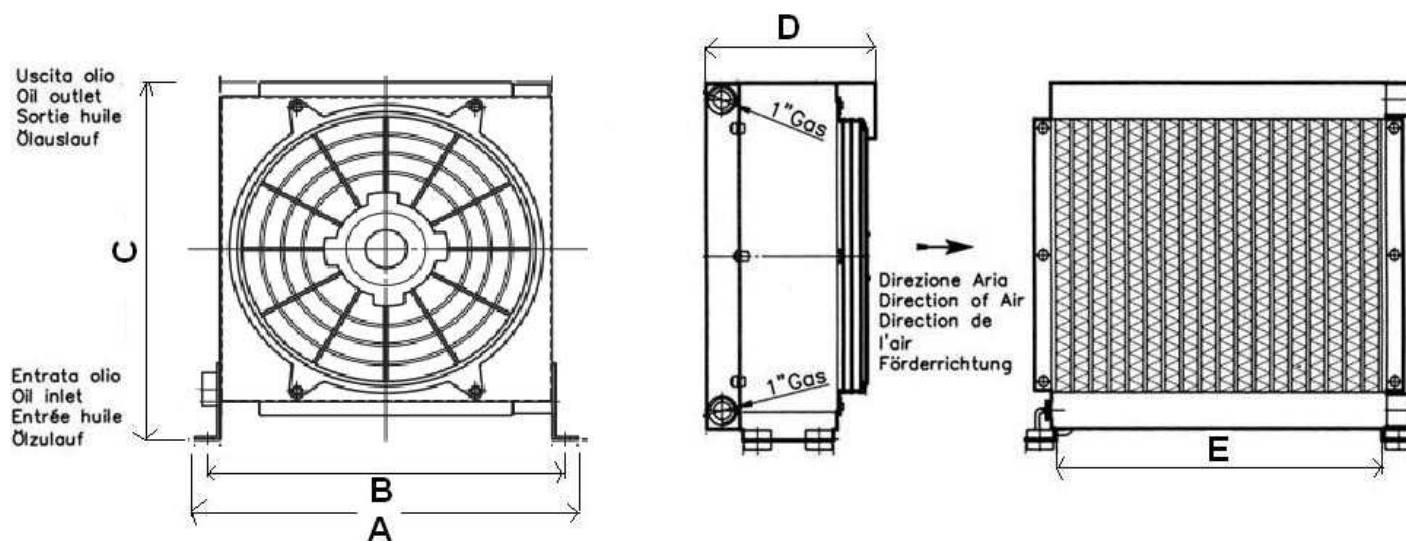

| Part n°                | R1    | Voltage (V) | Power (W) | Min. flow (l/min) | Max. flow (l/min) | Cap. (l) | Air flow (m³/h) | P(IP) | Current | Noise level db(A) | A   | B   | C   | D     | E   |
|------------------------|-------|-------------|-----------|-------------------|-------------------|----------|-----------------|-------|---------|-------------------|-----|-----|-----|-------|-----|
| <b>APL26312VT247</b>   | 3/4"  | 12 VDC      | 70        | 10                | 90                | 1,7      | 580             | 64    | 5,8     | 75                | 232 | 150 | 315 | 165,5 |     |
| <b>APL300/224VT247</b> | 1"    | 24 VDC      | 180       | 30                | 180               | 3,6      | 2.200           | 64    | 7,5     | 83                | 475 | 450 | 380 | 211   | 425 |
| <b>APL30024VT247</b>   | 1"    | 24 VDC      | 180       | 20                | 150               | 2        | 1.600           | 64    | 7,5     | 79                | 370 | 345 | 375 | 207   | 320 |
| <b>APL430/224VT247</b> | 1"    | 24 VDC      | 200       | 30                | 200               | 5,5      | 2.500           | 64    | 8,25    | 82                | 520 | 485 | 519 | 244   | 460 |
| <b>APL58024VT247</b>   | 1"1/2 | 24 VDC      | 240       | 50                | 250               | 11,5     | 2.900           | 64    | 10      | 85                | 564 | 524 | 680 | 295   | 464 |