


Sea water/oil heat exchangers


1/2



MS134

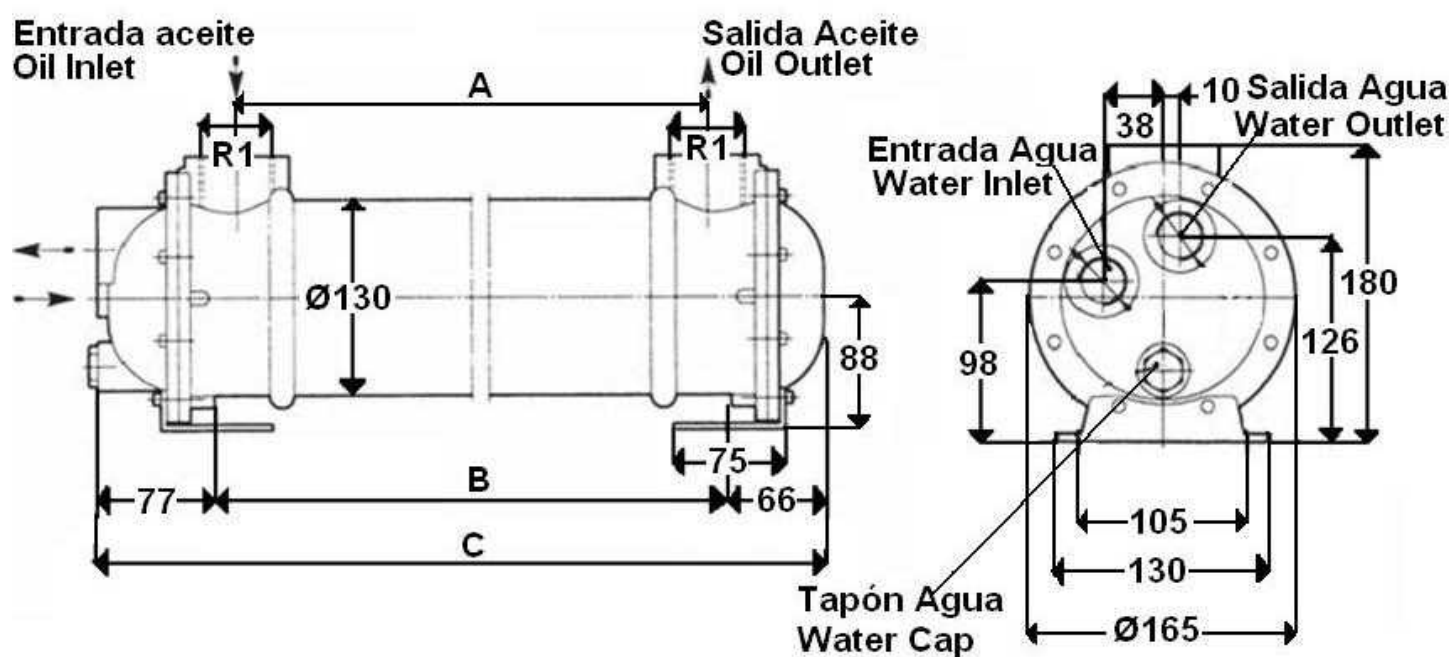

Sea water/oil heat exchangers

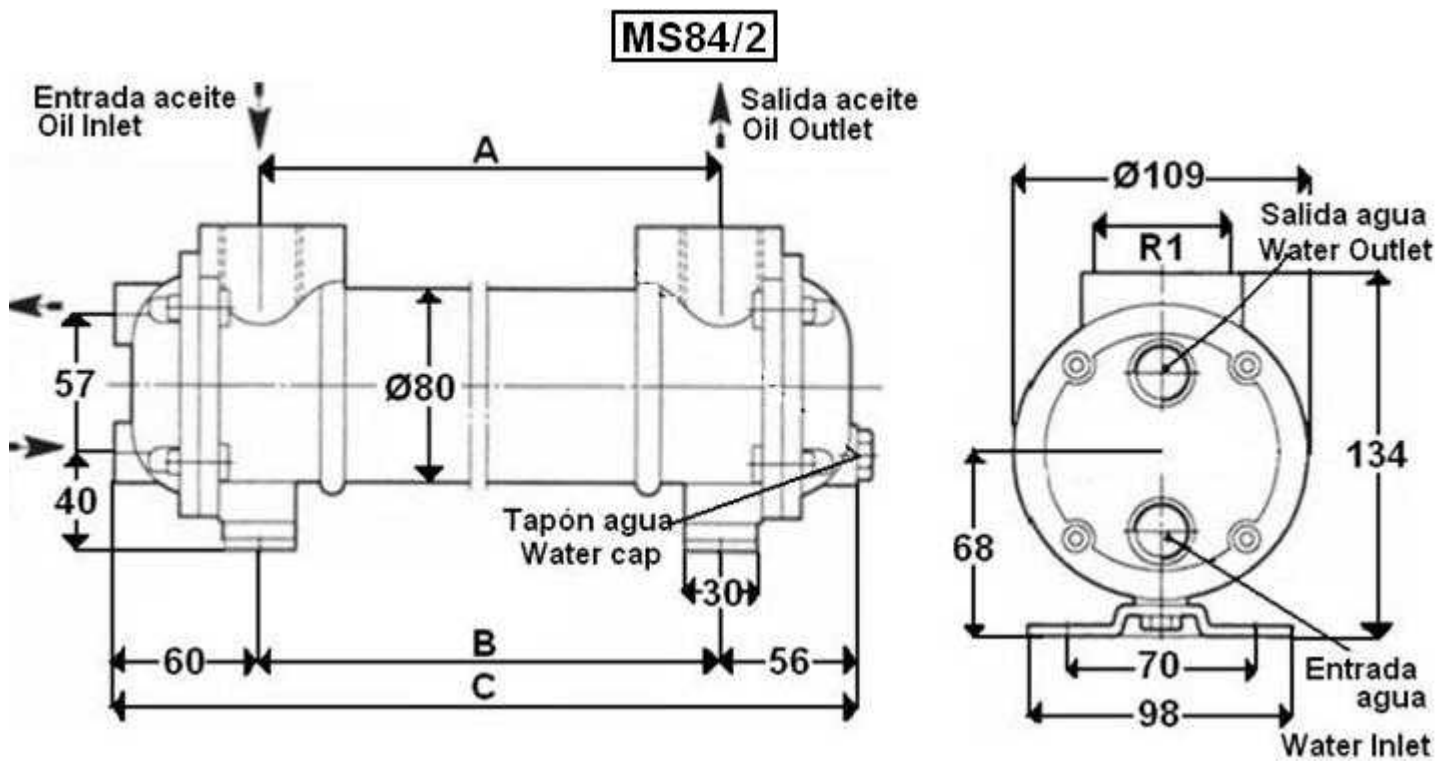

- Pipes:** Copper Nickel 90/10, 5x7 mm
Mantle: Brass
Internal plates: Brass
Caps: Bronze

Part nº	R1	Power (W)	Min. flow (l/min)	Max. flow (l/min)	A	B	C
MS84/2B2	1" BSP	7-8	20	60	310	310	430
MS84/2B3	1"1/2 BSP	7-8	50	100	310	325	445
MS84/2B4	1" BSP	14-16	30	80	560	560	680
MS134B2	1" 1/2 BSP	33-37	40	130	535	496 - 594	690
MS134B4	1" 1/2 BSP	48-56	80	250	845	806 - 904	1.000

*Power - kW=50°C, 46 cSt, H2O=15°C
Accessible tube bundle.
The maximum work pressure allowed in the oil and water circuits is 12 bar