


# Banjo coupling with captive seal and o'ring BSP cylindrical

Stainless Steel AISI 316-L

1/1

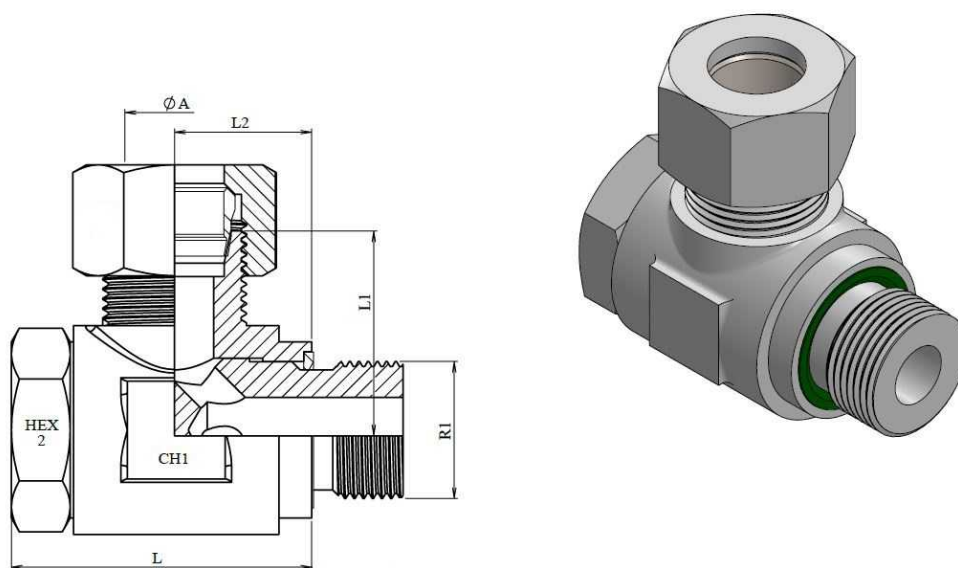

| Part nº                  | ØA | Serie | R1        | Working Pressure (bar) | L    | L1   | L2   | HEX 2 | CH1 |
|--------------------------|----|-------|-----------|------------------------|------|------|------|-------|-----|
| <b>Z WSVL 6 R 1/8</b>    | 6  | L     | 1/8" BSP  | 315                    | 31,5 | 12   | 18,5 | 17    | 17  |
| <b>Z WSVL 6 R 1/4</b>    | 6  | L     | 1/4" BSP  | 315                    | 42   | 16,5 | 27   | 17    | 17  |
| <b>Z WSVL 8 R 1/4</b>    | 8  | L     | 1/4" BSP  | 315                    | 42   | 14,5 | 27   | 19    | 22  |
| <b>Z WSVL 10 R 1/4</b>   | 10 | L     | 1/4" BSP  | 315                    | 41,6 | 15,5 | 26,6 | 19    | 22  |
| <b>Z WSVL 12 R 3/8</b>   | 12 | L     | 3/8" BSP  | 315                    | 47   | 18   | 28,5 | 24    | 27  |
| <b>Z WSVL 15 R 1/2</b>   | 15 | L     | 1/2" BSP  | 315                    | 58   | 21,5 | 33,5 | 27    | 32  |
| <b>Z WSVL 18 R 1/2</b>   | 18 | L     | 1/2" BSP  | 315                    | 60   | 21,8 | 35,5 | 27    | 32  |
| <b>Z WSVL 22 R 3/4</b>   | 22 | L     | 3/4" BSP  | 160                    | 68   | 27,5 | 40   | 36    | 41  |
| <b>Z WSVL 28 R 1</b>     | 28 | L     | 1" BSP    | 160                    | 82   | 32   | 48,5 | 46    | 50  |
| <b>Z WSVL 35 R 1 1/4</b> | 35 | L     | 1"1/4 BSP | 160                    | 95   | 36   | 55,5 | 50    | 60  |
| <b>Z WSVL 42 R 1 1/2</b> | 42 | L     | 1"1/2 BSP | 160                    | 96   | 40,5 | 62,5 | 60    | 70  |
| <b>Z WSVS 6 R 1/4</b>    | 6  | S     | 1/4" BSP  | 400                    | 42   | 16,5 | 27   | 19    | 22  |
| <b>Z WSVS 8 R 1/4</b>    | 8  | S     | 1/4" BSP  | 400                    | 42   | 16,5 | 27   | 19    | 22  |
| <b>Z WSVS 10 R 3/8</b>   | 10 | S     | 3/8" BSP  | 400                    | 47,5 | 18,5 | 28,5 | 24    | 27  |
| <b>Z WSVS 12 R 3/8</b>   | 12 | S     | 3/8" BSP  | 400                    | 47   | 18,5 | 28,5 | 24    | 27  |
| <b>Z WSVS 14 R 1/2</b>   | 14 | S     | 1/2" BSP  | 400                    | 58   | 22,5 | 33,5 | 27    | 32  |
| <b>Z WSVS 16 R 1/2</b>   | 16 | S     | 1/2" BSP  | 400                    | 60   | 22   | 35,5 | 27    | 32  |
| <b>Z WSVS 20 R 3/4</b>   | 20 | S     | 3/4" BSP  | 400                    | 68   | 26,5 | 40   | 36    | 41  |
| <b>Z WSVS 25 R 1</b>     | 25 | S     | 1" BSP    | 400                    | 82   | 31,5 | 49,5 | 46    | 50  |
| <b>Z WSVS 30 R 1 1/4</b> | 30 | S     | 1"1/4 BSP | 400                    | 95   | 37   | 55,5 | 55    | 60  |
| <b>Z WSVS 38 R 1 1/2</b> | 38 | S     | 1"1/2 BSP | 315                    | 96   | 41,5 | 62,5 | 60    | 70  |

SEAL MATERIAL FKM