
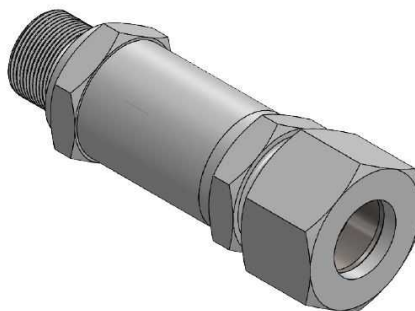


Non-return valve flow from male stud end BSP cylindrical

Stainless Steel AISI 316-L

1/1

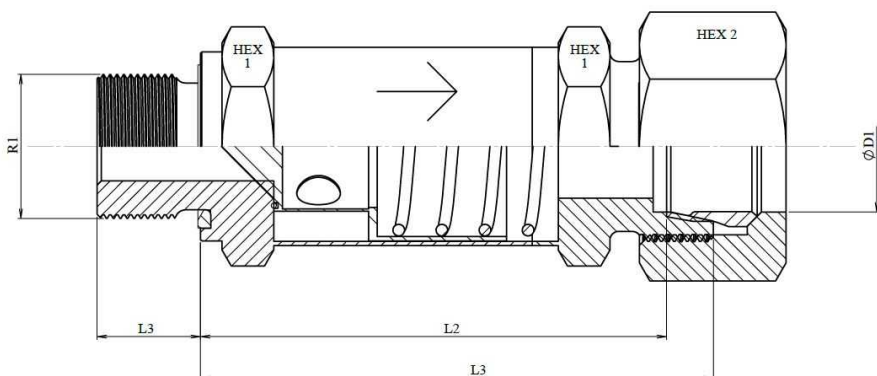

Opening pressure: 1 bar

Max Temperature: 200° C

FKM o´ring

Working Temperature: -20°C to +120°C

Part nº	ØD1	Serie	R1	Working Pressure (bar)	L1	L2	L3	HEX 1	HEX 2
Z RHVL 6 R 1/8	6	L	1/8" BSP	315	35	28	8	17	17
Z RHVL 8 R 1/4	8	L	1/4" BSP	315	37	30	12	19	19
Z RHVL 10 R 1/4	10	L	1/4" BSP	315	45,5	38,5	12	22	24
Z RHVL 12 R 3/8	12	L	3/8" BSP	315	49,5	42,5	12	27	30
Z RHVL 15 R 1/2	15	L	1/2" BSP	315	52,5	45,5	14	27	32
Z RHVL 18 R 1/2	18	L	1/2" BSP	315	57,5	50	14	36	36
Z RHVL 22 R 3/4	22	L	3/4" BSP	160	62,5	55	16	41	46
Z RHVL 28 R 1	28	L	1" BSP	160	70,5	63	18	50	55
Z RHVL 35 R 1 1/4	35	L	1"1/4 BSP	160	79,5	69	20	60	60
Z RHVL 42 R 1 1/2	42	L	1"1/2 BSP	160	80	69	22	65	70
Z RHVS 6 R 1/4	6	S	1/4" BSP	630	38,5	31,5	12	19	19
Z RHVS 8 R 1/4	8	S	1/4" BSP	630	38,5	31,5	12	19	19
Z RHVS 10 R 3/8	10	S	3/8" BSP	630	45,5	38	12	22	24
Z RHVS 12 R 3/8	12	S	3/8" BSP	630	48,5	41	12	24	27
Z RHVS 14 R 1/2	14	S	1/2" BSP	630	52,5	44,5	14	27	32
Z RHVS 16 R 1/2	16	S	1/2" BSP	400	56,5	48	14	32	36
Z RHVS 20 R 3/4	20	S	3/4" BSP	400	62,5	52	16	38	41
Z RHVS 25 R 1	25	S	1" BSP	400	66,5	54,5	18	46	50
Z RHVS 30 R 1 1/4	30	S	1"1/4 BSP	400	77,5	64	20	55	60
Z RHVS 38 R 1 1/2	38	S	1"1/2 BSP	315	85,5	72	22	65	70