
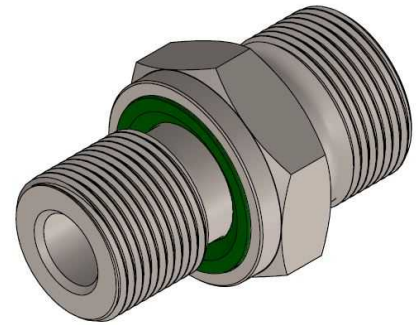


Straight male stud coupling Metric cylindrical with captive seal, only body

Stainless Steel AISI 316-L

1/1

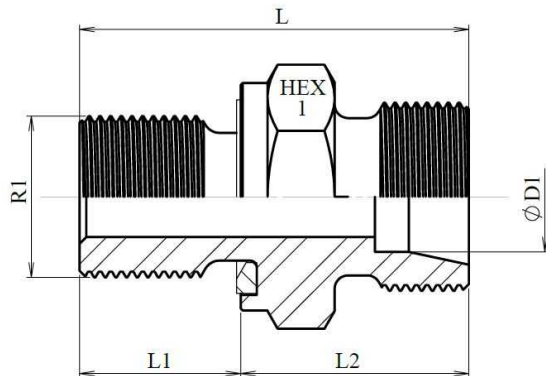

Part n°	THREAD	PIPE	SERIES	WORK PRESSURE (bar)	LONGITUDINAL TOTAL	LONGITUDINAL L1	LONGITUDINAL L2	HEXAGONAL 1
Z STA AL 6 M 10X1 WD	M10x1	6	L	315	23,5	8	23,5	17
Z STA AL 8 M 12X1.5 WD	M12x1.5	8	L	315	29	12	25	19
Z STA AL 10 M 12X1.5 WD	M12x1.5	10	L	315	29	12	17	17
Z STA AL 10 M 14X1.5 WD	M14x1.5	10	L	315	30	12	26	17
Z STA AL 10 M 16X1.5 WD	M16x1.5	10	L	315	30	12	18	22
Z STA AL 12 M 16X1.5 WD	M16x1.5	12	L	315	31,5	12	27,5	22
Z STA AL 12 M 18X1.5 WD	M18x1.5	12	L	315	31,5	12	27,5	22
Z STA AL 12 M 22X1.5 WD	M22x1.5	12	L	315	35	14	29	22
Z STA AL 15 M 18X1.5 WD	M18x1.5	15	L	315	32,5	12	28,5	27
Z STA AL 18 M 22X1.5 WD	M22x1.5	18	L	315	36	14	31	32
Z STA AL 22 M 26X1.5 WD	M26x1.5	22	L	160	40	16	33	36
Z STA AL 28 M 33X2 WD	M33x2	28	L	160	43	18	34	41
Z STA AL 35 M 42X2 WD	M42X2	35	L	160	48	20	28	50
Z STA AL 42 M 48X2 WD	M48X2	42	L	160	52	22	30	55
Z STA AS 6 M 12X1.5 WD	M12x1.5	6	S	630	32	12	20	19
Z STA AS 6 M 14X1.5 WD	M14x1.5	6	S	630	31	12	19	19
Z STA AS 8 M 14X1.5 WD	M14x1.5	8	S	630	31	12	19	19
Z STA AS 10 M 16X1.5 WD	M16x1.5	10	S	315	34	12	22	22
Z STA AS 12 M 14X1.5 WD	M14x1.5	12	S	315	34	12	22	22
Z STA AS 12 M 18X1.5 WD	M18x1.5	12	S	630	36,5	12	33,5	24
Z STA AS 14 M 20X1.5 WD	M20X1.5	14	S	400	40.5	14	26,5	27
Z STA AS 16 M 22X1.5 WD	M22x1.5	16	S	400	41	14	37	30
Z STA AS 20 M 27X2 WD	M27x2	20	S	400	47	16	42	36
Z STA AS 25 M 33X2 WD	M33X2	25	S	315	52.5	18	34,5	41
Z STA AS 30 M 42X2 WD	M42X2	30	S	315	57	20	37	50
Z STA AS 38 M 48X2 WD	M48X2	38	S	315	64	22	42	55