
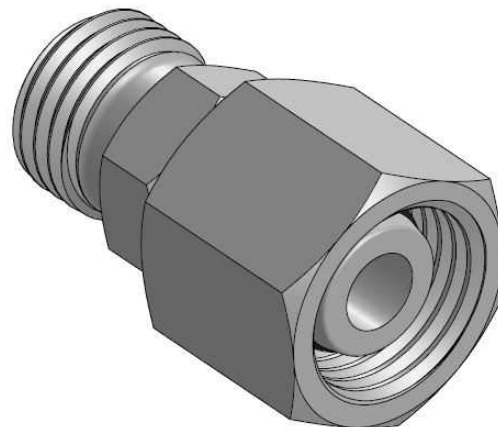


**Standpipe reducer with taper only body (heavy series)**

Stainless Steel AISI 316-L

1/1

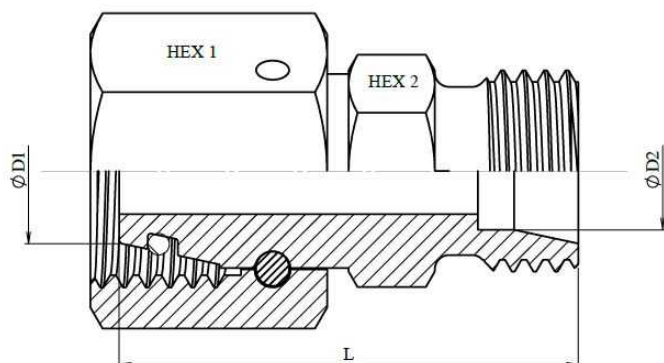

| Part n°                     | ØD1 | ØD2 | Serie | Working Pressure (bar) | L    | HEX 1 | HEX 2 |
|-----------------------------|-----|-----|-------|------------------------|------|-------|-------|
| <b>Z STA KORS 8-6 TLM</b>   | 8   | 6   | S     | 630                    | 35,5 | 19    | 17    |
| <b>Z STA KORS 10-6 TLM</b>  | 10  | 6   | S     | 630                    | 37,5 | 22    | 17    |
| <b>Z STA KORS 10-8 TLM</b>  | 10  | 8   | S     | 630                    | 37,5 | 22    | 17    |
| <b>Z STA KORS 12-6 TLM</b>  | 12  | 6   | S     | 630                    | 38   | 24    | 19    |
| <b>Z STA KORS 12-8 TLM</b>  | 12  | 8   | S     | 630                    | 38   | 24    | 19    |
| <b>Z STA KORS 12-10 TLM</b> | 12  | 10  | S     | 630                    | 38   | 24    | 19    |
| <b>Z STA KORS 14-10 TLM</b> | 14  | 10  | S     | 630                    | 38   | 27    | 19    |
| <b>Z STA KORS 14-12 TLM</b> | 14  | 12  | S     | 630                    | 38   | 27    | 19    |
| <b>Z STA KORS 16-6 TLM</b>  | 16  | 6   | S     | 400                    | 40,5 | 30    | 22    |
| <b>Z STA KORS 16-8 TLM</b>  | 16  | 8   | S     | 400                    | 40,5 | 30    | 22    |
| <b>Z STA KORS 16-10 TLM</b> | 16  | 10  | S     | 400                    | 40,5 | 30    | 22    |
| <b>Z STA KORS 16-12 TLM</b> | 16  | 12  | S     | 400                    | 40,5 | 30    | 22    |
| <b>Z STA KORS 20-8 TLM</b>  | 20  | 8   | S     | 400                    | 45   | 30    | 27    |
| <b>Z STA KORS 20-10 TLM</b> | 20  | 10  | S     | 400                    | 45   | 36    | 27    |
| <b>Z STA KORS 20-12 TLM</b> | 20  | 12  | S     | 400                    | 45   | 36    | 27    |
| <b>Z STA KORS 20-14 TLM</b> | 20  | 14  | S     | 400                    | 47   | 36    | 27    |
| <b>Z STA KORS 20-16 TLM</b> | 20  | 16  | S     | 400                    | 47   | 36    | 27    |
| <b>Z STA KORS 25-12 TLM</b> | 25  | 12  | S     | 400                    | 46,5 | 36    | 36    |
| <b>Z STA KORS 25-16 TLM</b> | 25  | 16  | S     | 400                    | 48,5 | 46    | 36    |
| <b>Z STA KORS 25-20 TLM</b> | 25  | 20  | S     | 400                    | 50,5 | 46    | 36    |
| <b>Z STA KORS 30-16 TLM</b> | 30  | 16  | S     | 400                    | 53   | 50    | 41    |
| <b>Z STA KORS 30-20 TLM</b> | 30  | 20  | S     | 400                    | 55   | 50    | 41    |
| <b>Z STA KORS 38-30 TLM</b> | 38  | 30  | S     | 315                    | 61   | 60    | 50    |