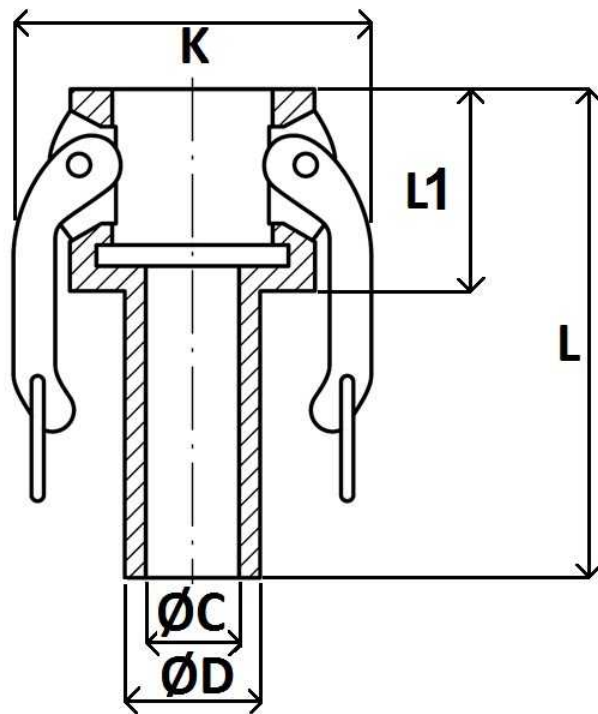


Autolock, female, with serrated hose shank Type C

Stainless Steel AISI 316

1/1

**AUTOLOCK SYSTEM**

Norms: Male thread according to EN10226-1
Female thread according to ISO 228-1

PN: 1/2 "- 4" 150 PSI ----- 5 "- 6" 75 PSI

Part nº	DN	R1	L	L1	ØC	ØD	K
ZC012S	12	1/2"	69	28	85	14	46
ZC020S	20	3/4"	80	50	14,7	20,4	62,8
ZC025S	25	1"	94	38,2	20,6	26,5	62,8
ZC032S	32	1"1/4	106	44	27,5	33	78,5
ZC040S	40	1"1/2	107	44	34	40	80
ZC050S	50	2"	126	48,3	45	53	96
ZC065S	65	2"1/2	122	52,2	53	66	104
ZC080S	80	3"	152	53,4	66	78	130
ZC100S	100	4"	175	62	92	103	158

The dimensions in micro-casting parts are approximated in those elements without mechanization.
NBR gasket