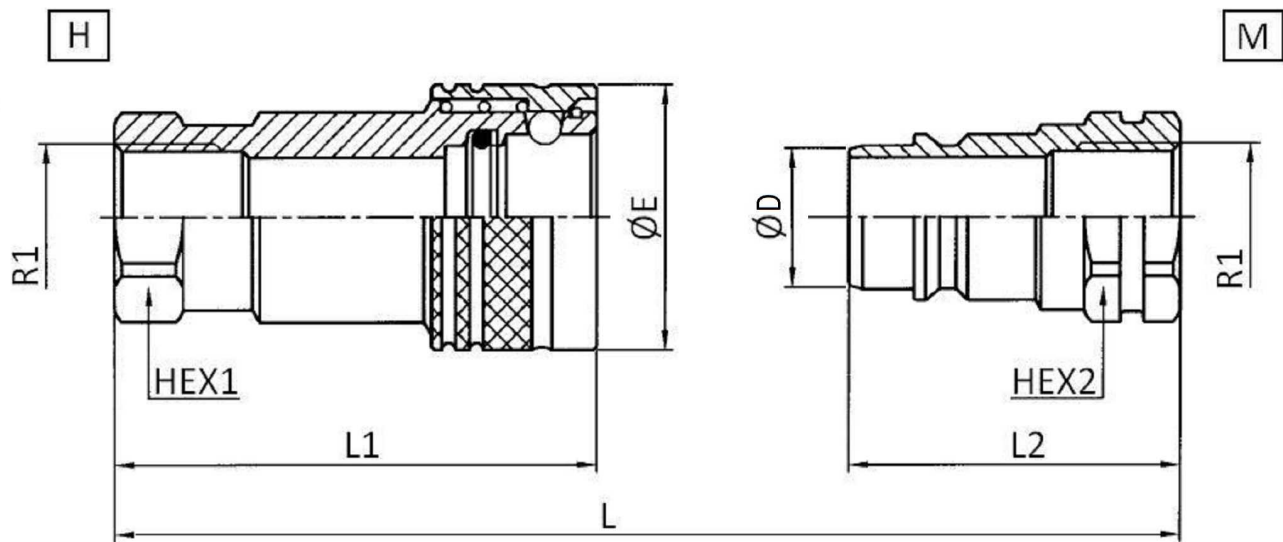


Quick coupling free flow 7241-B

Stainless Steel AISI 316

1/1**Material:** Stainless Steel AISI 316**Seals:** FKM + PTFE**Working temperature:** -25°C / +200°C**Working pressure:** 50-350 bar

Part n°	R1	Working Pressure (bar)	ISO size	BG size	Coupling	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØD	ØFlow(l/min)
Z830102	1/8" BSP	350	5	0	M	40	48		31		14	10,9	20
Z830104	1/4" BSP	350	6,3	1	M	90	52		35		19	14,2	45
Z830106	3/8" BSP	350	10	2	M	220	56		39		22	19,1	106
Z830108	1/2" BSP	350	12,5	3	M	380	63		45		27	23,55	189
Z830112	3/4" BSP	200	20	4	M	560	74		53,5		34	31,45	288
Z830116	1" BSP	200	25	5	M	760	87		63		41	37,8	379
Z830120	1"1/4 BSP	60	40	7	M	1.000	117		85		60	44,5	757
Z830124	1"1/2 BSP	60	40	7	M	1.000	117		85		60	44,5	757
Z830132	2" BSP	50	50	8	M	1.500	135		100		70	63,2	1.000
Z830202	1/8" BSP	350	5	0	H	40	48	35		14		-	24 20
Z830204	1/4" BSP	350	6,3	1	H	90	52	38		19		-	28 45
Z830206	3/8" BSP	350	10	2	H	220	56	42		24		-	35 106
Z830208	1/2" BSP	350	12,5	3	H	380	63	46		30		-	42 189
Z830212	3/4" BSP	200	20	4	H	560	74	54		36		-	51,5 288
Z830216	1" BSP	200	25	5	H	760	87	64		41		-	60 379
Z830220	1"1/4 BSP	60	40	7	H	1.000	117	85		65		-	75 757
Z830224	1"1/2 BSP	60	40	7	H	1.000	117	85		65		-	75 757
Z830232	2" BSP	50	50	8	H	1.500	135	100		80		-	105 1.000