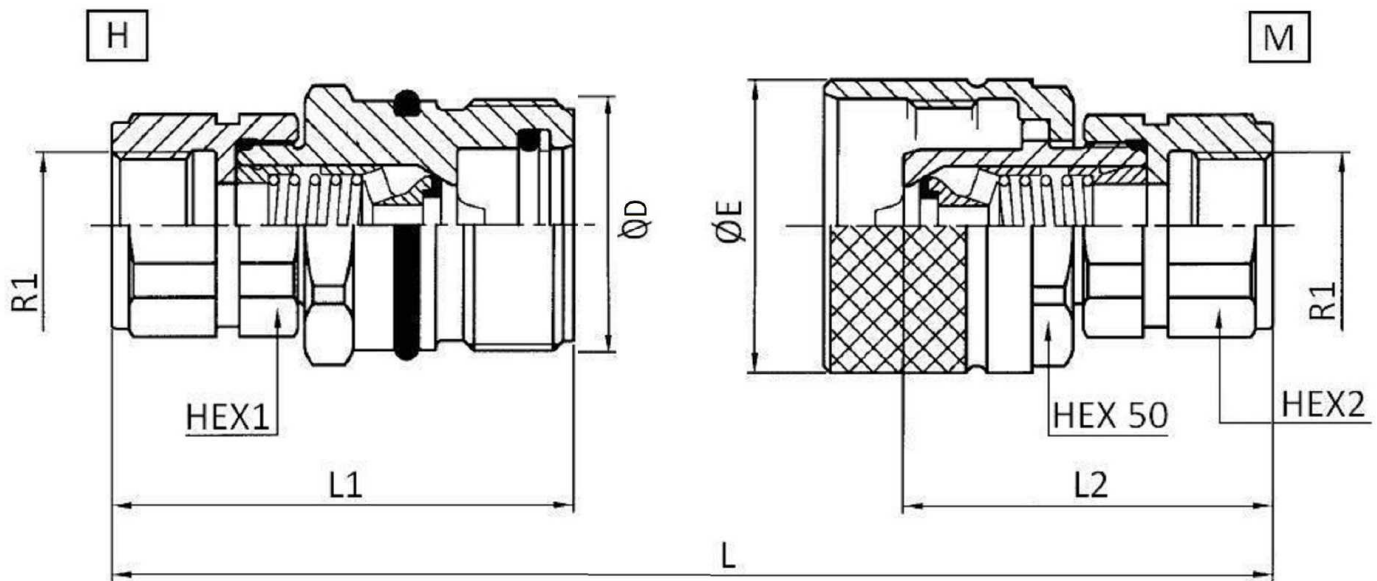


Quick screw couplings ISO 14541

Stainless Steel AISI 316

1/1

**Material:** Stainless Steel AISI 316**Seals:** FKM + PTFE**Working temperature:** -25°C / +200°C**Working pressure:** 100-300 bar**Connection under pressure:** Allowed (both male or female side)**Max residual pressure:** Working pressure

Part n°	R1	Working Pressure (bar)	ISO size	BG size	Coupling	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØD	ØFlow(l/min)	
Z800804	1/4" BSP	120	6,3	1	M	17	92		58		19	M24x2	12	
Z800806	3/8" BSP	250	10	2	M	30	100		61		22	M28x2	23	
Z800808	1/2" BSP	250	12,5	3	M	80	102		64,5		30	M36x2	45	
Z800812	3/4" BSP	150	20	4	M	106	136		78,5		36	M42x2	106	
Z800816	1" BSP	150	25	5	M	189	138		87,5		41	M48x3	189	
Z800820	1"1/4 BSP	100	40	6	M	288	193		121		60	M70X3	288	
Z800824	1"1/2 BSP	100	40	6	M	288	193		121		60	M70X3	288	
Z800904	1/4" BSP	120	6,3	1	H	17	92	59		19		-	30	12
Z800906	3/8" BSP	250	10	2	H	30	100	64		22		-	34	23
Z800908	1/2" BSP	250	12,5	3	H	80	102	67,5		30		-	42	45
Z800912	3/4" BSP	150	20	4	H	106	136	85,5		36		-	48	106
Z800916	1" BSP	150	25	5	H	189	138	100		41		-	55	189
Z800920	1"1/4 BSP	100	40	6	H	288	193	116		60			80	288
Z800924	1"1/2 BSP	100	40	6	H	288	193	116		60			80	288