


2 ways ball valve: tube connector light serie TrAle

Stainless Steel AISI 316-L

1/1

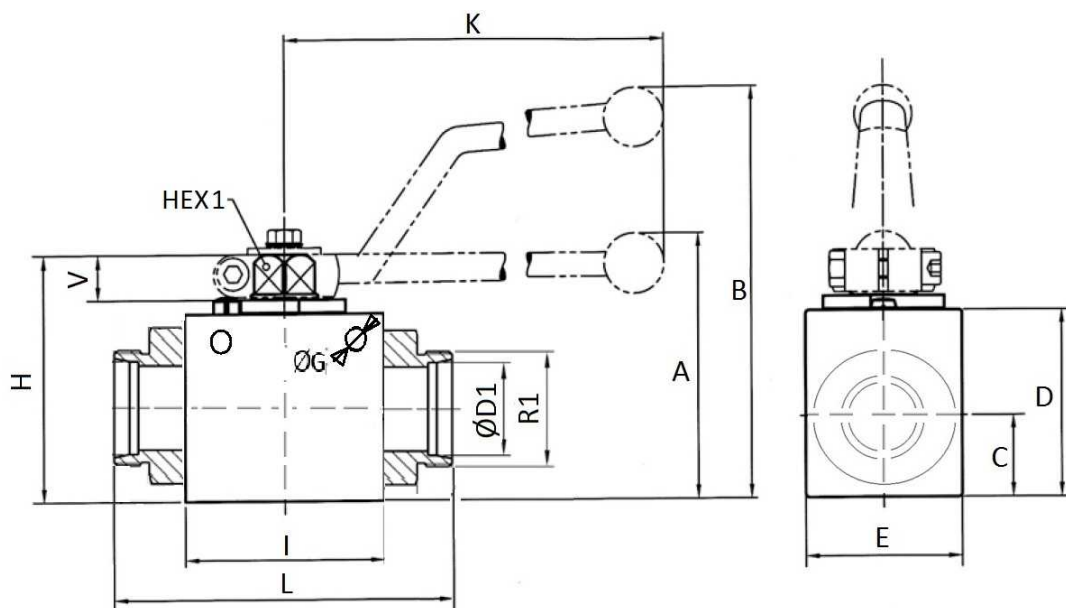

Standard o-ring: NBR

Ball seat: POM (polyoxymethylene)

Handle: Zn

Tmin/Tmax: -20°C/+100°C

ØG: 4.5mm (DN4,DN6) : 6.5mm (DN10,DN13,DN16,DN20,DN25)

Part n°	DN	ØD1	R1	Working Pressure (bar)	HEX 1	A	B	C	D	E	H	I	K	L	V
ZGB2V 8 L	6	8 L	M14X1,5	500	9	-	82	13,5	33	26	47	40	115	67	11
ZGB2V 10 L	8	10 L	M16X1,5	500	9	-	82	13,5	33	26	47	40	115	74	11
ZGB2V 12 L	10	12 L	M18X1,5	500	9	-	86	17,5	38	32	52	43	115	74	11
ZGB2V 15 L	13	15 L	M22X1,5	400	9	-	89	19	40	35	54	48	115	82	11
ZGB2V 18 L	16	18 L	M26X1,5	500	12	-	106	19	46	38	54	48	160	82	13
ZGB2V 22 L	20	22 L	M30X2	315	14	79	-	24,5	57	49	75	62	200	101	14
ZGB2V 28 L	25	28 L	M36X2	315	50	108	65	64	28,5	170	115	55	57	6,7	6