


2 ways ball valve: tube connector heavy serie Trale

Stainless Steel AISI 316-L

1/1

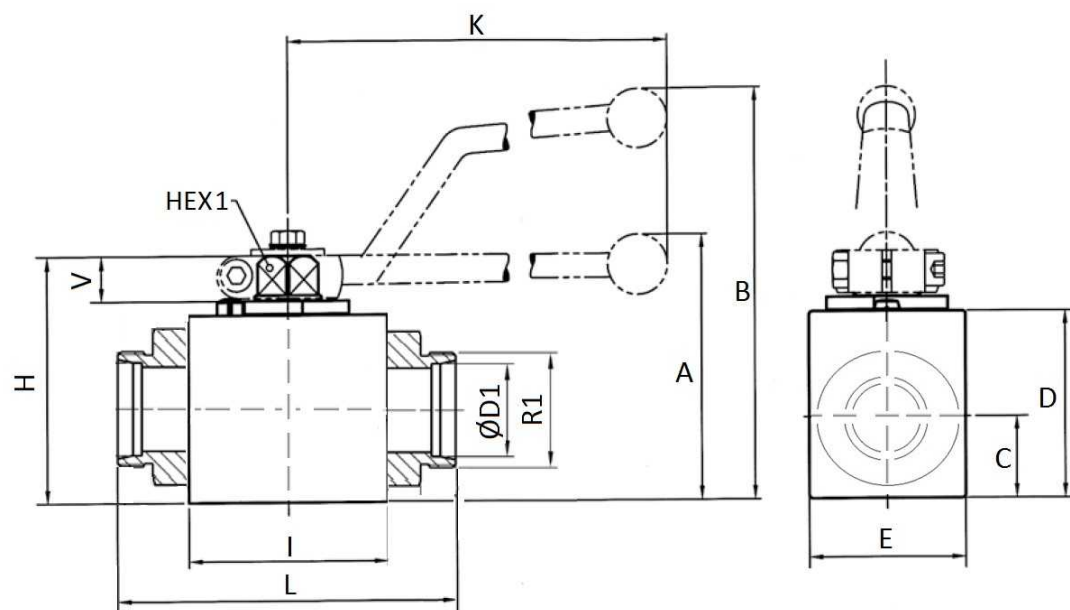

Standard o-ring: NBR

Ball seat: POM (polyoxymethylene)

Handle: Zn

Tmin/Tmax: -20°C/+100°C

Part n°	DN	ØD1	R1	MAX. PRESSURE (bar)	HEX 1	A	B	C	D	E	H	I	K	L	V
ZGB2V 8 S	4	8 S	M16X1.5	500	9	-	82	13,5	33	26	47	40	115	73	11
ZGB2V 10 S	6	10 S	M18X1.5	500	9	-	82	13,5	33	26	47	40	115	73	11
ZGB2V 12 S	8	12 S	M20X1.5	500	9	-	82	13,5	33	26	47	40	115	73	11
ZGB2V 14 S	10	14 S	M22X1.5	500	9	-	86	17,5	38	32	52	43	115	80	11
ZGB2V 16 S	13	16 S	M24X1.5	500	9	-	89	19	40	35	54	48	115	86	11
ZGB2V 20 S	16	20 S	M30X2	500	9	-	89	19	40	35	54	48	115	90	11
ZGB2V 25 S	20	25 S	M36X2	500	14	79	-	24,5	57	49	75	62	200	109	14