


3 Way ball-valve female ISO 228

Stainless Steel AISI 316

1/1

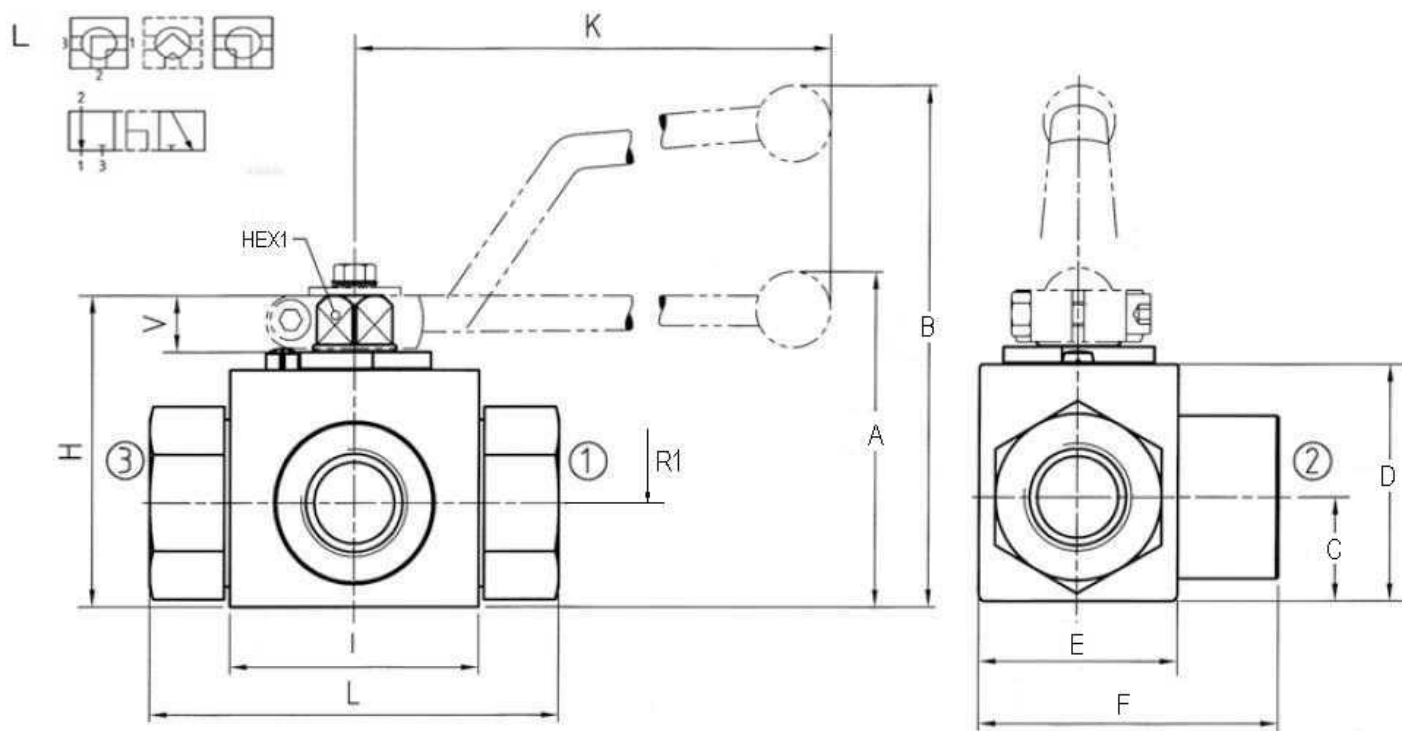

Lever: Zn

Tmin/Tmax: -20°C/+100°C

Standard o-ring: NBR

Ball seat: POM

Part n°	DN	R1	MAX. PRESSURE (bar)	HEX 1	A	B	C	D	E	F	H	I	K	L	V
ZGB3VH 1/4	6	1/4" BSP	500	9		82	13,5	33	29	47.5	47	40	115	69	11
ZGB3VH 3/8	10	3/8" BSP	500	9		86	17,5	38	35	52	52	43	115	72	11
ZGB3VH 1/2	13	1/2" BSP	500	9		89	19	40	38	59	54	48	115	83	11
ZGB3VH 3/4	20	3/4" BSP	500	9	79		24,5	57	52	72	75	62	200	95	14
ZGB3VH 1	25	1" BSP	315	14	87		29,5	65	61	85.5	83	66	200	113	14

The pressure has to enter through the central port of the valve.
Valve comes with through bores