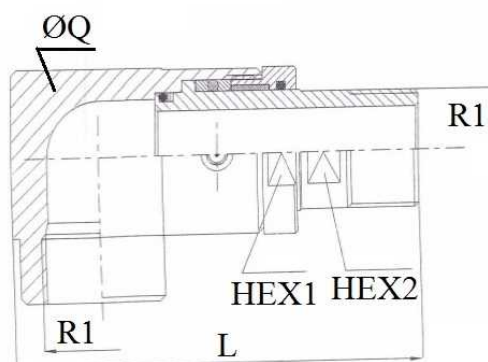
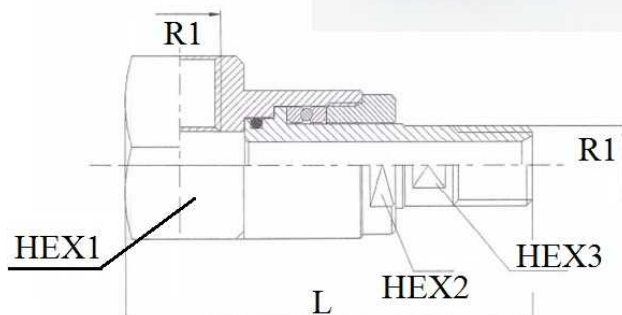


Elbow 90° swivel female TrAle

Stainless Steel AISI 316-L

1/1**Temperature:** -15°C to +250°C**O-rings** FKM**Rotation speed:** 5-10 rpm

Part n°	R1	FLOW MAX (l/min)	L	HEX 1	HEX 2	HEX 3	ØQ	Max. static press (bar)
Z GG90 1/4	1/4" BSP	24	78	32	21	11		300
Z GG90 3/8	3/8 " BSP	45	98	36	27	14		300
Z GG90 1/2	1/2" BSP	90	106	46	32	18		300
Z GG90 3/4	3/4 " BSP	210	118	50	41	24		250
Z GG90 1	1" BSP	280	142	60	46	30		250
Z GG90 1 1/4	1" 1/4 BSP	379	155	55	38		60	180
Z GG90 1 1/2	1" 1/2 BSP	860	170	70	41		75	150
Z GG90 2	2 " BSP	1.400	190	80	55		95	150

Warning: The swivel joints in line and 90 ° are NOT eligible for fast and continuous rotation, but only for angular displacement