


Pressure gauge DN 63 vertical connection

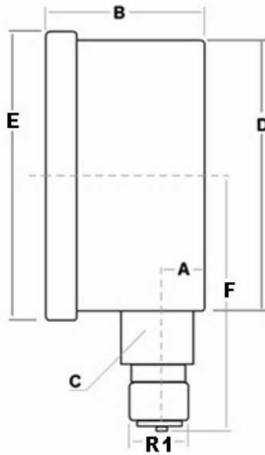

**Accuracy:** 1,6%

**Dimensions:** A=10  
B=29  
C=14  
D=62  
E=68  
F=57

**Temperature:** from -10 up to +60

**Fitting and internal components:** Stainless steel 316L

**Case:** Stainless steel 304

**Windshield:** Polycarbonate

| Part nº        | R2       | Scale (bar) |
|----------------|----------|-------------|
| ZMFI6304002.5V | 1/4" BSP | 0-2.5       |
| ZMFI6304004V   | 1/4" BSP | 0-4         |
| ZMFI6304006V   | 1/4" BSP | 0-6         |
| ZMFI6304010V   | 1/4" BSP | 0-10        |
| ZMFI6304016V   | 1/4" BSP | 0-16        |
| ZMFI6304025V   | 1/4" BSP | 0-25        |
| ZMFI6304040V   | 1/4" BSP | 0-40        |
| ZMFI6304060V   | 1/4" BSP | 0-60        |
| ZMFI6304100V   | 1/4" BSP | 0-100       |
| ZMFI6304160V   | 1/4" BSP | 0-160       |
| ZMFI6304250V   | 1/4" BSP | 0-250       |
| ZMFI6304400V   | 1/4" BSP | 0-400       |
| ZMFI6304600V   | 1/4" BSP | 0-600       |

Pressure gauges AISI 316 with glycerin  
Pressure gauge DN 63 with glycerin



**Pressure gauge DN 63 vertical connection**

| Part n° | R2 | Scale (bar) |
|---------|----|-------------|
|---------|----|-------------|

With dual bar/psi scale  
IP 65